
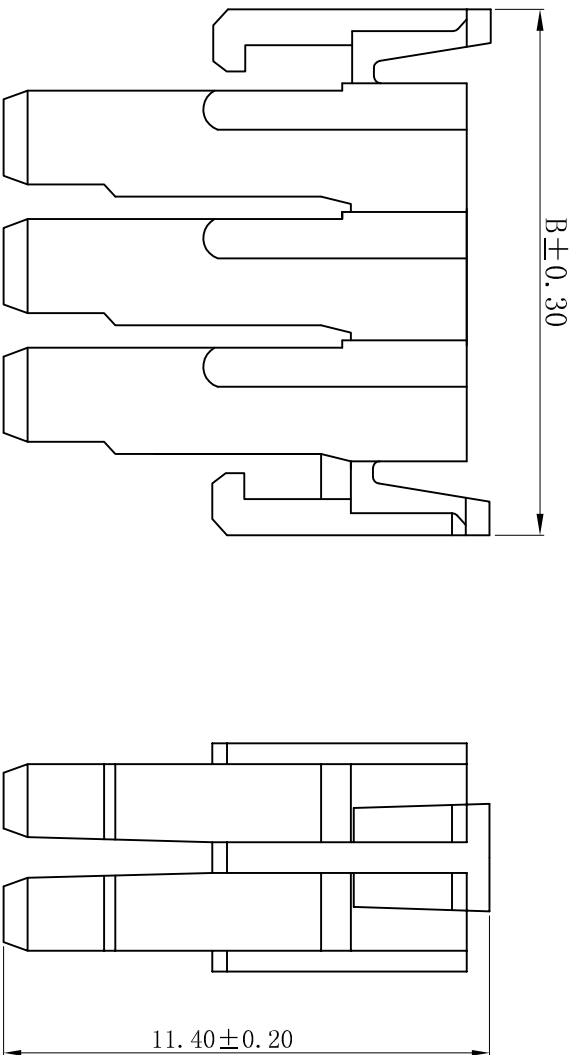


RoHS

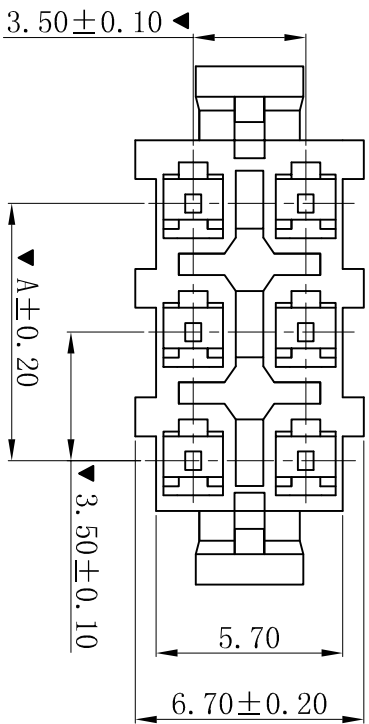

- SPECIFICATIONS
- Voltage rating: 1400V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 3800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No.: H3502-2xNP
 - Housing Material: PA66 UL94V-0
 - The Dimension Marked “▲” Must Be Recorded

PART NO.	Dimensions (mm)	
	A	B
2x03	7.00	14.00
2x06	17.50	24.50

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .00±0.25 .000±0.05 ANGLE: ±1°	0±0.30 .00±0.25 .000±0.05 ANGLE: ±1°
C	修订版本	2015-11-04	陈雄军	绘图/DR	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHECK	胡进
A	新版本	2011-05-24	陈雄军	批准/APPRO	胡进
H	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期/DATE
1					2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/Sheet: 1/1
版本/Rev: D

品名 (PART NAME): BHS 3.50mm Male Housing Connector Series
料号 (PART NO): H3502-2xNP
状态码: C