
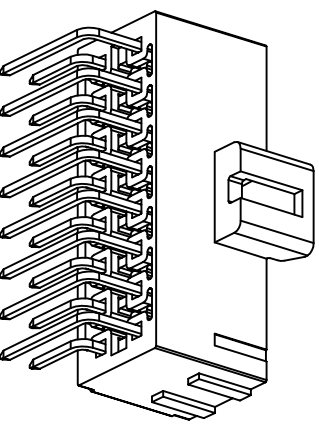
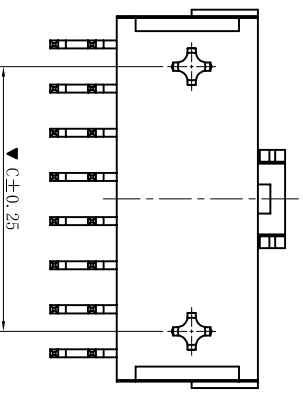
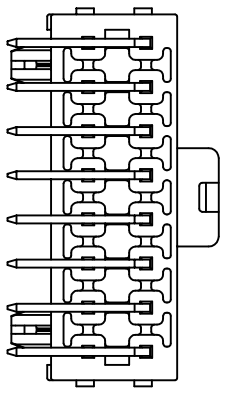

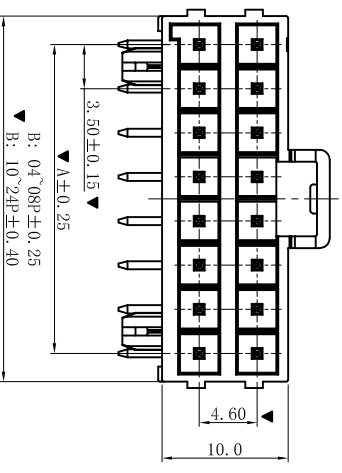
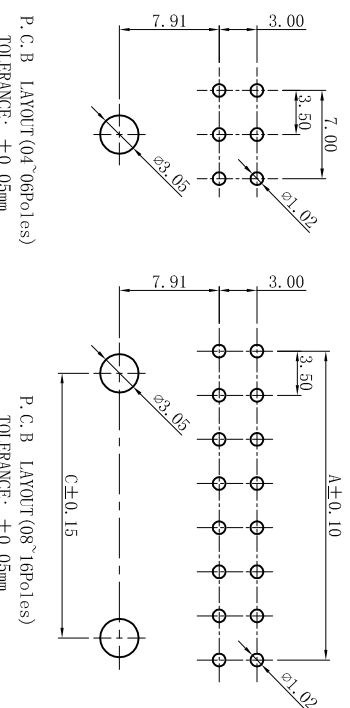


RoHS

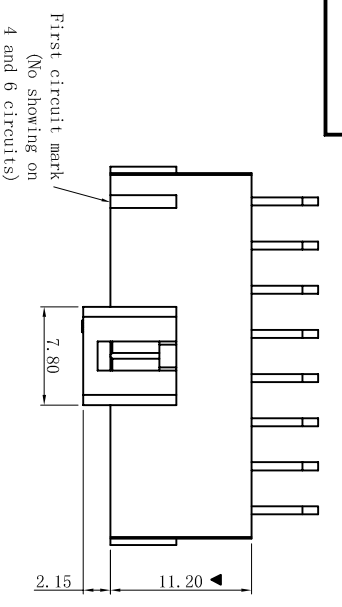

■ SPECIFICATIONS

- Voltage rating: 400V AC, DC
- Current rating: 14A, AC, DC
- Withstanding Voltage: 1800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C~+105° C
- Contact resistance: 15mΩ max

■ WAFER

- Part No.: W3501RD-2xNP-XX-TS
- Poles : 04-16P
- Housing Material: LCP UL94V-0, Black or Natural
- Pin Material: Brass
- Contact Area Plating: Tin or Gold-Plated
- The Dimension Marked “▼” Must Be Recorded

Part No.:
W3501RD-2xNP-X X-TS

- None: Tin-Plated
 - G: Gold-Flash
 - G15: 15u" Gold
 - G30: 30u" Gold
- A: A Key, Black
B: B Key, Natural

Poles	Dim. A	Dim. B	Dim. C
4	3.50	8.00	
6	7.00	11.50	
8	10.50	15.00	7.00
10	14.00	18.50	10.50
12	17.50	22.00	14.00
14	21.00	25.50	17.50
16	24.50	29.00	21.00
24	38.50	43.00	35.00

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

Connectors
Projection
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/Sheet: 1/2
版本/Rev: A

品名 (PART NAME): 3.50mm DIP 90° Wafer Connector Series
料号 (PART NO.): W3501RD-2xNP-XX-TS

绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	
日期/DATE	2019-10-08

日期 DATE:	2019-10-08
承认 APPRO.	

说明 DESCRIPTION: 新版本

版次 REV. A

1 2 3 4 5 6 7 8 9 10