
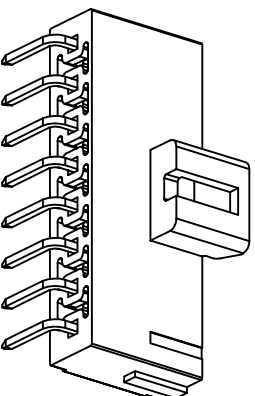
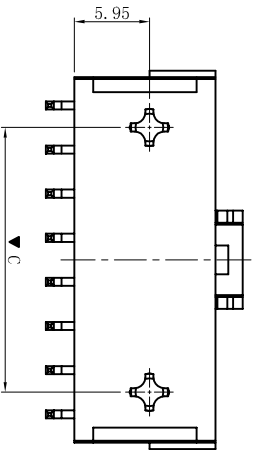
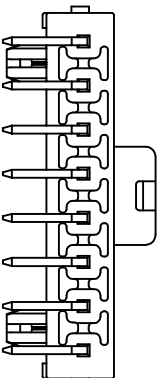

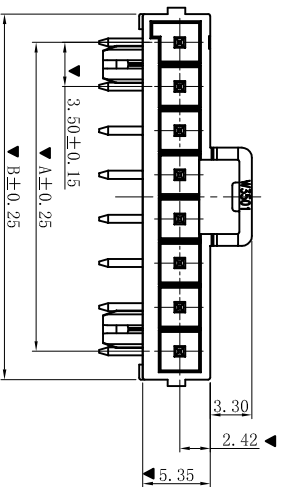
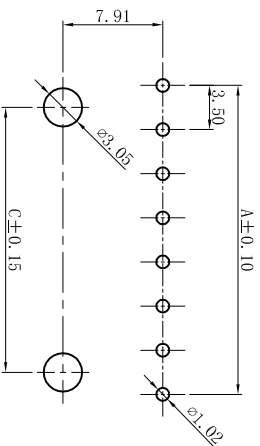



ROHS HF

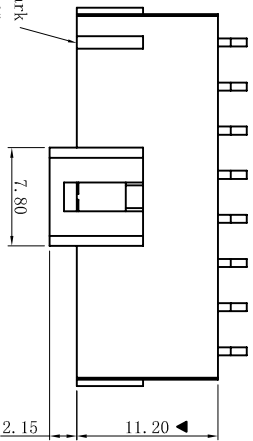

■ SPECIFICATIONS

- Voltage rating: 400V AC, DC
- Current rating: 14A, AC, DC
- Withstanding Voltage: 1800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C~+105° C
- Contact resistance: 15mΩ max

■ WAFER

- Part No.: W3501RD-NP-X-HF-TS
- Poles : 02-08P
- Housing Material: LCP UL94V-0, Black or Natural, Halogen Free
- Pin Material: Brass
- Contact Area Plating: Tin/Gold-Plated
- The Dimension Marked “▼” Must Be Recorded

Part No.: W3501RD-NP-X-HF-TS

▼ A: A Key, Black  
▼ B: B Key, Natural

Poles	Dim. A	Dim. B	Dim. C
2	3.50	8.00	
3	7.00	11.50	
4	10.50	15.00	7.00
5	14.00	18.50	10.50
6	17.50	22.00	14.00
7	21.00	25.50	17.50
8	24.50	29.00	21.00
12	38.50	43.00	35.00

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connector's CO., Ltd

一般公差  
GENERAL TOLERANCE:  
0±0.30  
.00±0.25  
.000±0.15  
ANGLE: ±1°

绘图/DR  
审核/CHECK  
批准/APPRO

投影法  
Projection  
单位 Unit  
比例/Scale

品名  
(PART NAME)  
3.50mm DIP 90° Wafer  
Connector Series

日期/DATE  
2019-10-08

页码/SHEET  
版本/Rev  
A

料号  
(PART NO)  
W3501RD-NP-X-HF-TS  
状态码  
C

说明  
DESCRIPTION  
新版本

日期  
DATE  
2019-10-08

承认  
APPRO.  
2019-10-08

审核/CHK  
胡进

版本号  
REV.  
A