


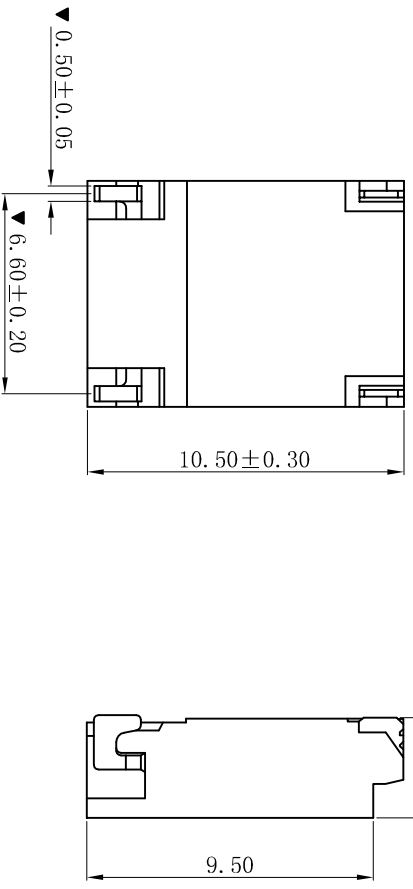


RoHS

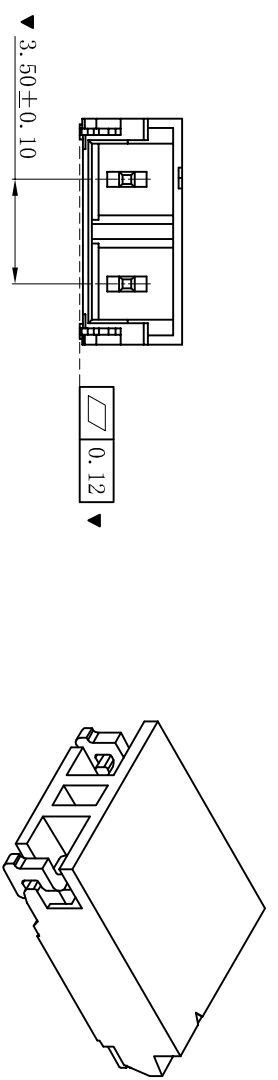

- SPECIFICATIONS**
- Voltage rating: 1400V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 3800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No. : W3501SR-02P
 - Housing Material: PA6T UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

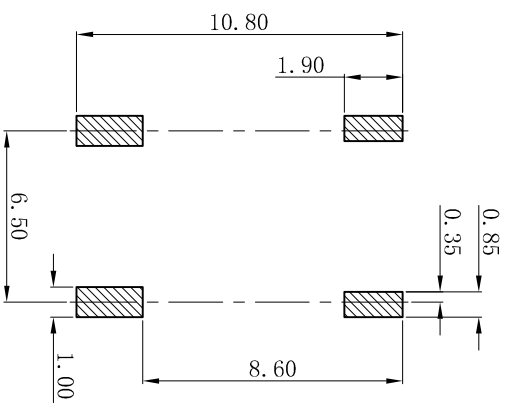

P. C. B LAYOUT
TOLERANCE: ±0.05mm

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

更新图面	2019-06-03	陈雄军
修打版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRIPTION	DATE:	APPRO.

版次 REV.	1
版次 REV.	2
版次 REV.	3
版次 REV.	4
版次 REV.	5
版次 REV.	6
版次 REV.	7
版次 REV.	8
版次 REV.	9
版次 REV.	10

投影法 Projection	第一角投影 First Angle Projection
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/Sheet	1/1
版本/Rev	D
品名 (PART NAME)	BHS 3.50mm SMT 90° Wafer Connector Series
料号 (PART NO)	W3501SR-02P
状态码	C