

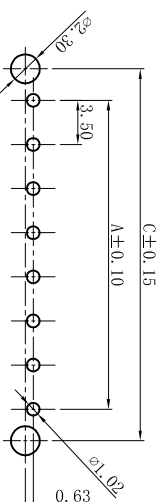
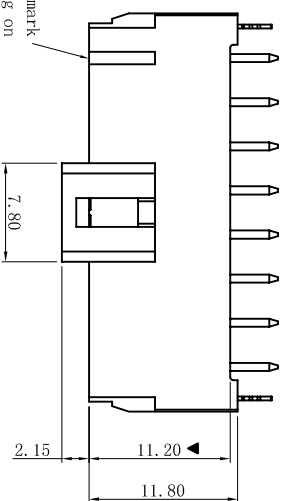
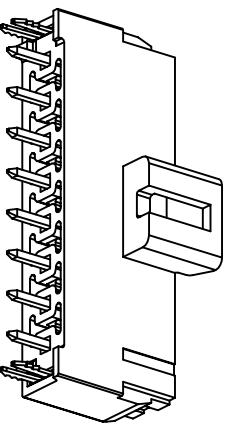
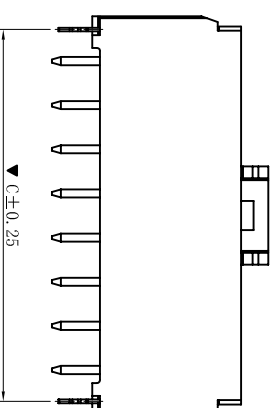



ROHS HF

First circuit mark
(not showing on
4 and 6 circuits
series)



P.C.B LAYOUT
TOLERANCE: ±0.05mm

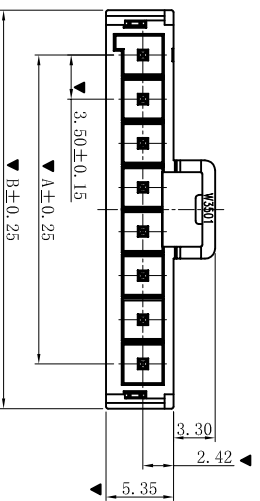

■ SPECIFICATIONS

- Voltage rating: 400V AC, DC
 - Current rating: 14A, AC, DC
 - Withstanding Voltage: 1800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40°C~+105°C
 - Contact resistance: 15mΩ max
- WAFER
- Part No.: W3501V-NP-X-HF-TS
 - Poles : 02-08P
 - Housing Material: LCP UL94V-0, Black or Natural, Halogen Free
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Part No.:
W3501V-NP-X-HF-TS

▼ A: A Key, Black
▼ B: B Key, Natural

Poles	Dim. A	Dim. B	Dim. C
2	3.50	10.60	8.50
3	7.00	14.10	12.00
4	10.50	17.60	15.50
5	14.00	21.10	19.00
6	17.50	24.60	22.50
7	21.00	28.10	26.00
8	24.50	31.60	29.50
12	38.50	45.60	43.50

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差
GENERAL TOLERANCE:
0±0.30
.00±0.25
.000±0.05
ANGLE: ±1°

绘图/DR
审核/CHECK
批准/APPRO

投影法
Projection
单位 Unit
MM

品名
(PART NAME)
3.50mm DIP 180° Wafer
带鱼叉 Connector Series

日期/DATE
2019-10-08

大小/SIZE
页码/SHEET
版本/Rev
A4
1/2
A

料号
(PART NO)
W3501V-NP-X-HF-TS
状态码
C

说明
DESCRIPTION
新版本
2019-10-08
版次
REV.

1 2 3 4 5 6 7 8 9 10