
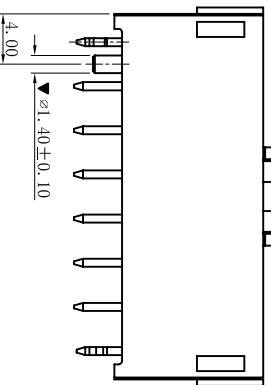
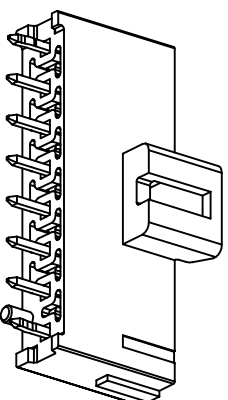
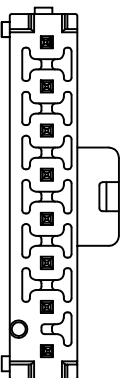

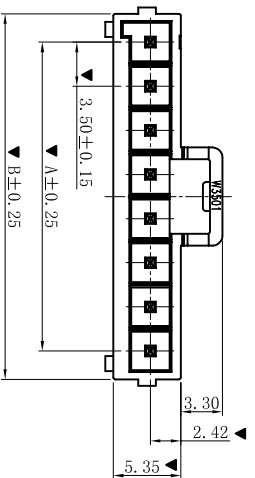
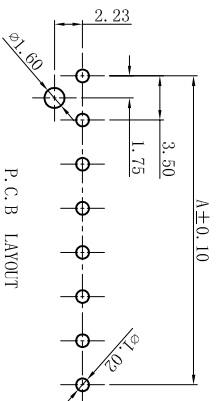


ROHS HF

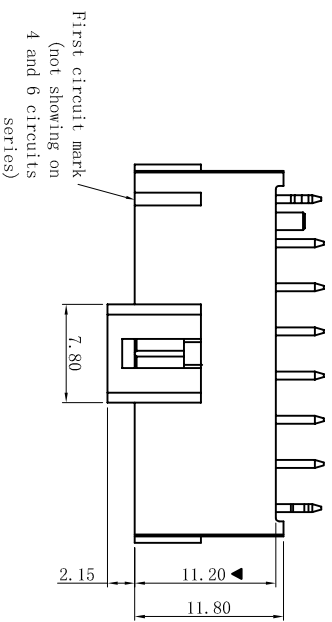

- SPECIFICATIONS
- Voltage rating: 400V AC, DC
  - Current rating: 14A, AC, DC
  - Withstanding Voltage: 1800V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -40°C~+105°C
  - Contact resistance: 15mΩ max
- WAFER
- Part No.: W3501VD-NP-X-HF-TS
  - Poles : 02-08P
  - Housing Material: LCP UL94V-0, Black or Natural, Halogen Free
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked "▼" Must Be Recorded

Part No.: W3501VD-NP-X-HF-TS

▼ A: A Key, Black  
▼ B: B Key, Natural

Poles	Dim. A	Dim. B
2	3.50	8.00
3	7.00	11.50
4	10.50	15.00
5	14.00	18.50
6	17.50	22.00
7	21.00	25.50
8	24.50	29.00
12	38.50	43.00

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

一般公差  
GENERAL TOLERANCE:  
0±0.30  
.0±0.25  
.000±0.05  
ANGLE: ±1°

绘图/DR  
审核/CHECK  
批准/APPRO

投影法  
Projection  
单位 Unit  
MM

品名  
(PART NAME)  
3.50mm DIP 180° Wafer  
带柱 Connector Series

日期/DATE  
2019-10-08

大小/SIZE  
A4  
页码/SHEET  
1/2  
版本/Rev  
A

料号  
(PART NO)  
W3501VD-NP-X-HF-TS  
状态码  
C

说明  
DESCRIPTION  
新版本

日期  
DATE  
2019-10-08

承认  
APPRO.

陈雄军  
胡进

单位 Unit  
MM  
比例/Scale  
1:1

料号  
(PART NO)  
W3501VD-NP-X-HF-TS  
状态码  
C

日期/DATE  
2019-10-08

大小/SIZE  
A4  
页码/SHEET  
1/2  
版本/Rev  
A

料号  
(PART NO)  
W3501VD-NP-X-HF-TS  
状态码  
C

日期/DATE  
2019-10-08

大小/SIZE  
A4  
页码/SHEET  
1/2  
版本/Rev  
A

料号  
(PART NO)  
W3501VD-NP-X-HF-TS  
状态码  
C