
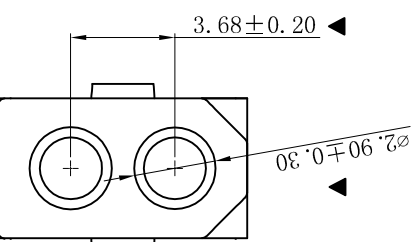
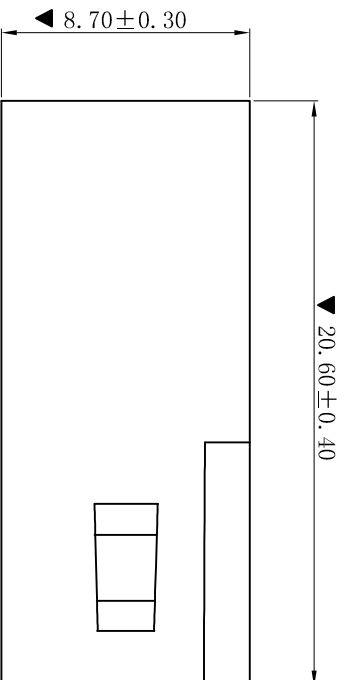


ROHS

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 5A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000M $\Omega$  min
  - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- HOUSING
- Part No.: H3681-1x02P-HZ
  - Poles : 02P
  - Housing Material: PA66 UL94 V0 or V2
- The Dimension Marked “▼” Must Be Recorded

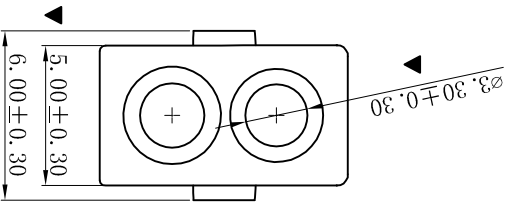

更新图面		2019-06-03		PPZ Duowu		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection		品名 (PART NAME)		3.68mm Male Housing Connector Series	
新版本		2019-01-09		PPZ Duowu		绘图/DR		ANGLE: ±1 $^{\circ}$		单位 Unit		(PART NO)		H3681-1x02P-HZ	
说明		日期		承认		审核/CHECK		陈雄军		比例/Scale		料号		状态码	
DESCRPTION		DATE:		APPRO.		批准/APPRO		胡进		大小/Size		A4		C	
1		2		3		4		5		日期/DATE		页码/SHEET		1/1	
1		2		3		4		5		2019-06-03		版本/Rev		B	

**XYDZ<sup>®</sup> 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

Connectors  
 H3681-1x02P-HZ