





H3681-02P
H3681NE-02P





H3681-04P
H3681NE-04P






- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No. : H3681-1xNP
 - Poles : 01-05P
 - Housing Material: PA66 UL94V-2
 - The Dimension Marked “▼” Must Be Recorded



H3681-03P
H3681NE-03P

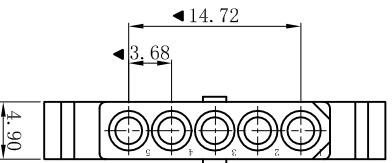

H3681-05P
H3681NE-05P

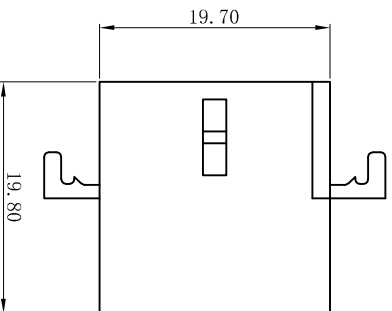

H3681-01P

D	更新图面	2019-06-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	修订版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	说明	日期	承认	说明
1	版次	REV.	DESCRIPTION	版次

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角	品名 (PART NAME)	3.68mm Male Housing
单位 Unit	MM	料号 (PART NO)	H3681-1xNP
比例/Scale	1:1	状态码	C
大小/Size	A4		
页码/Sheet	1/1		
版本/Rev	D		

一般公差 GENERAL TOLERANCE:	±0.30 .0±0.25 .00±0.20 .000±0.05
角度 ANGLE:	±1°

绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03