


ROHS

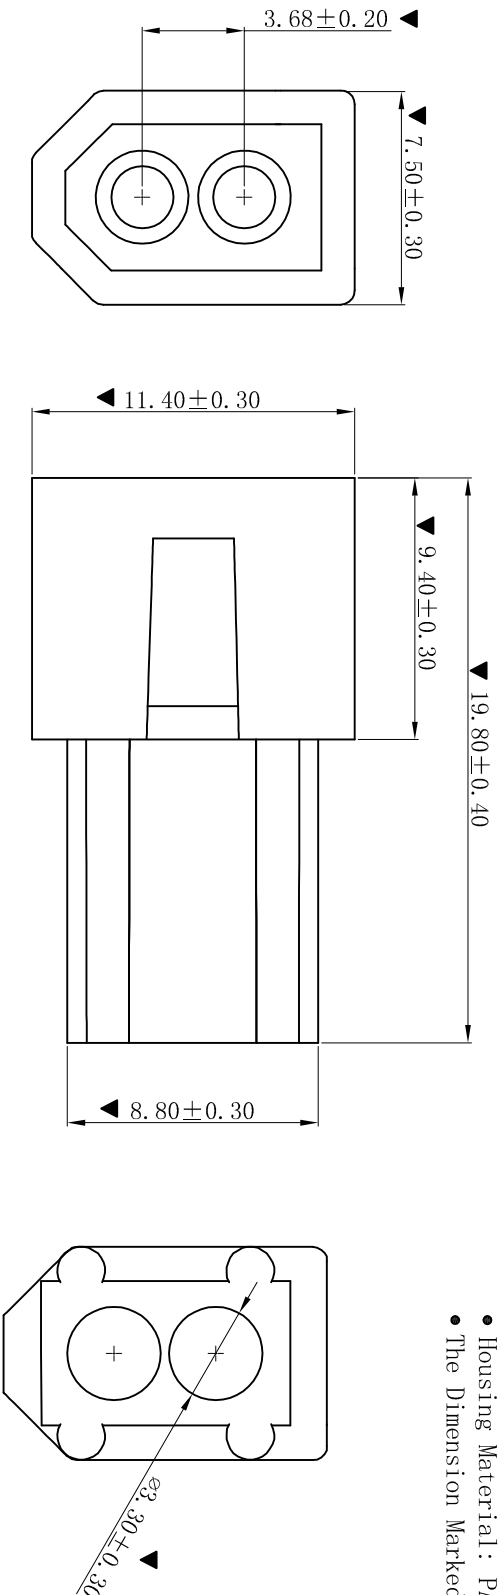

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 5A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25°C~+85°C
  - Contact resistance: 20mΩ max
- HOUSING
- Part No.: H3681-1x02P-HZ
  - Poles : 02P
  - Housing Material: PA66 UL94 V0 or V2
  - The Dimension Marked “▼” Must Be Recorded

A		1		2		3		4		5		6		7		8		9		10	
G																					
H		B		更新图面		2019-06-03		PPZ Duwu		PPZ Duwu		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05		绘图/DR		PPZ Duwu		投影法 Projection	
H		A		新版本		2019-01-09		PPZ Duwu		审核/CHECK		陈雄军		单位 Unit		MM		品名 (PART NAME)		3.68mm Female Housing Connector Series	
H		版次 REV.		说明 DESCRIPTION		日期 DATE		承认 APPRO.		日期/DATE		胡进		大小/SIZE		A4		料号 (PART NO)		H3682-1x02P-HZ	
H		1				5				2019-01-09		版本/Rev		1/1		B		状态码		C	

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd