





ROHS

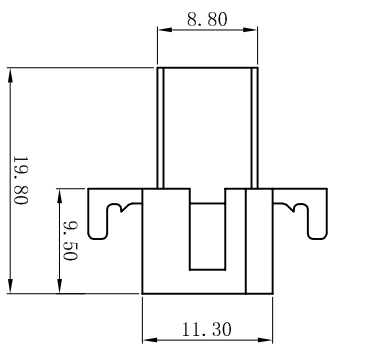


H3682-02P
H3682NE-02P

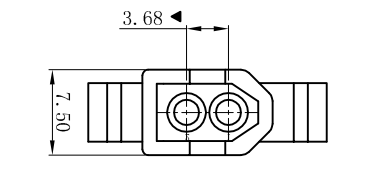


H3682-03P
H3682NE-03P

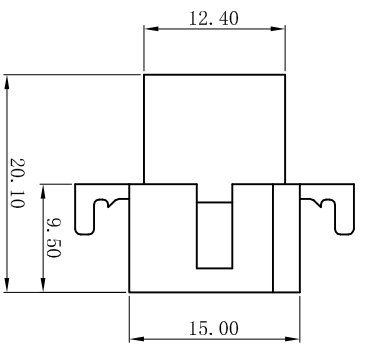



- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C ~ +85° C
- HOUSING
- Part No. : H3682-1xNP
 - Poles : 01-05P
 - Housing Material: PA66 UL94V-2
 - The Dimension Marked “▼” Must Be Recorded

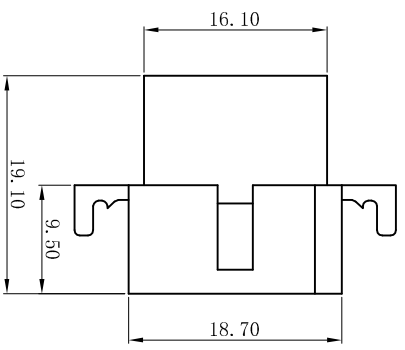



H3682-04P
H3682NE-04P

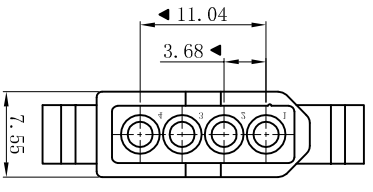

H3682-05P
H3682NE-05P

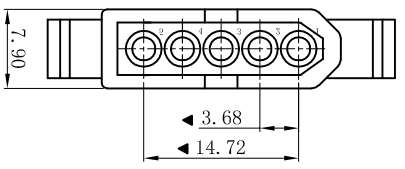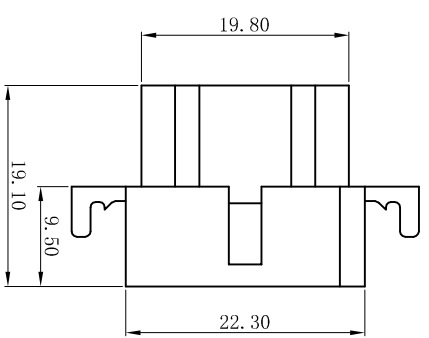

H3682-01P

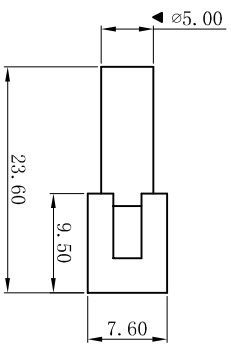

D	更新图面	2019-06-03	陈雄军
C	修訂版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	REV.	DESCRIPTION

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.000±0.20
	.000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/Sheet: 1/1
版本/Rev: D

品名 (PART NAME): 3.68mm Female Housing Connector Series
料号 (PART NO): H3682-1xNP
状态码: C