

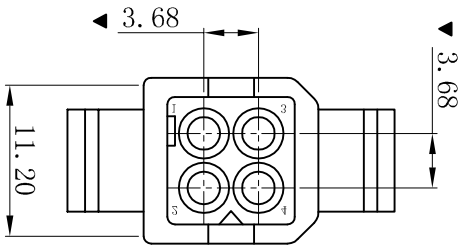
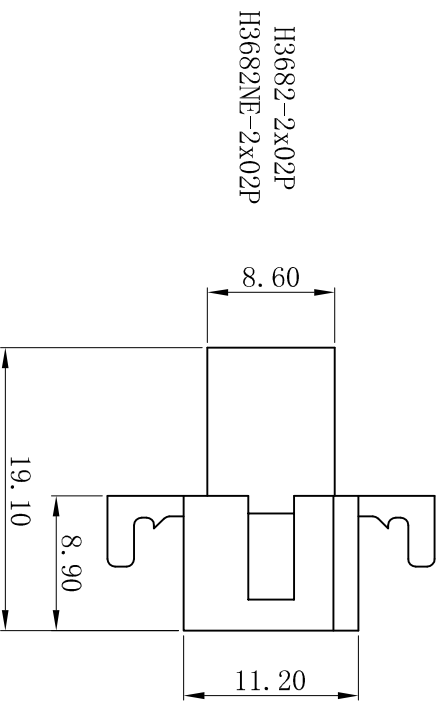


RoHS

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
  - Current rating: 5A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
- HOUSING**
- Part No.: H3682-2xNP
  - Poles : 04-06P
  - Housing Material: PA66 UL94V-2
- The Dimension Marked “▼” Must Be Recorded

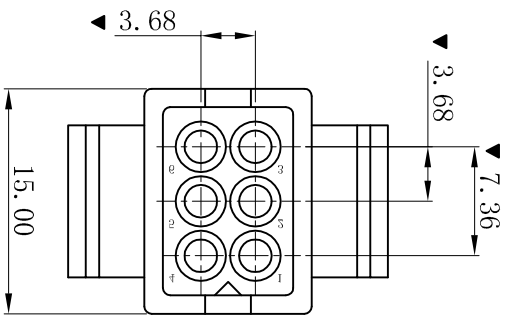

H3682-2x03P  
H3682NE-2x03P

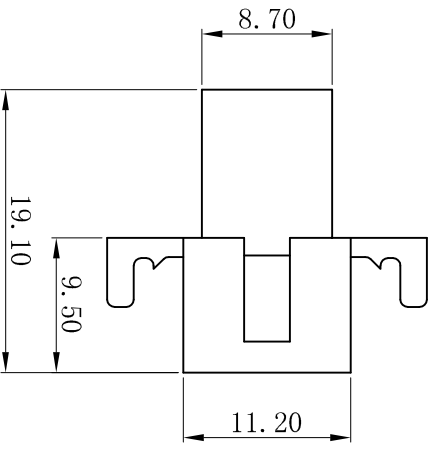

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: ±0.30 ±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) 3.68mm Female Housing Connector Series		料号 (PART NO) H3682-2xNP		状态码 C
修订版本		2015-11-04	陈雄军	绘图/DR		比例/Scale 1:1		东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd				
变更图览格式内容		2013-12-27	陈雄军	审核/CHECK		大小/Size A4						
新版本		2011-05-24	陈雄军	批准/APPRO		页码/SHEET 1/1						
说明		日期	承认	日期/DATE		版本/Rev						
DESCRPTION		DATE	APPRO.	2019-06-03		D						

1 2 3 4 5 6 7 8 9 10