

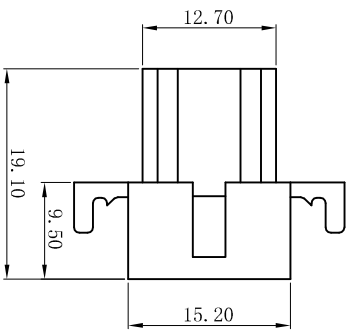




RoHS

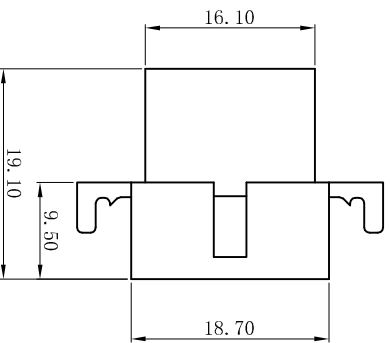


H3682-3x03P
H3682NE-3x03P

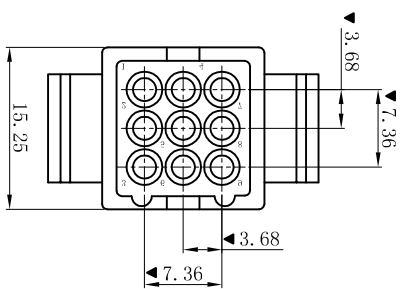

H3682-3x04P
H3682NE-3x04P

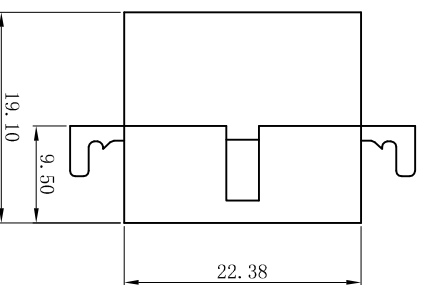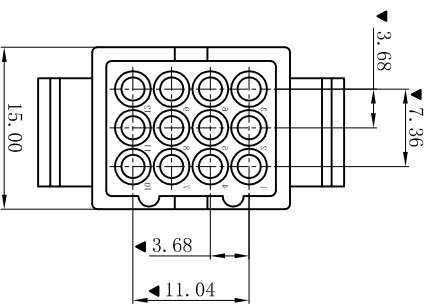

H3682-3x05P
H3682NE-3x05P

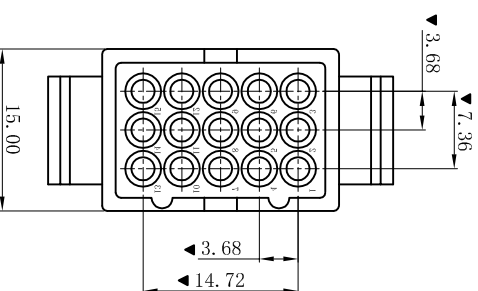

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- HOUSING
- Part No.: H3682-3xNP
 - Poles : 09-15P
 - Housing Material: PA66 UL94V-2
 - The Dimension Marked “▲” Must Be Recorded

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	REV.	APPRO.
2	DESCRIPTION		
3	DESCRPTION		

一般公差	0 \pm 0.30
GENERAL TOLERANCE:	.00 \pm 0.25
	.000 \pm 0.20
	.000 \pm 0.05
ANGLE: \pm 1 $^{\circ}$	

XYDZ[®] 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	D
品名 (PART NAME)	3.68mm Female Housing Connector Series
料号 (PART NO)	H3682-3xNP
状态码	C