
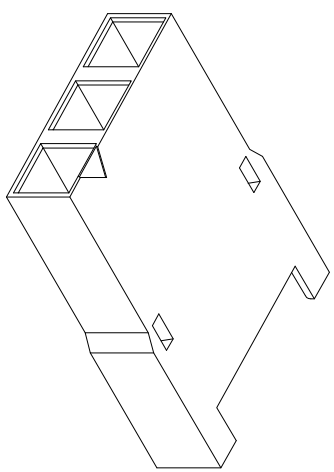
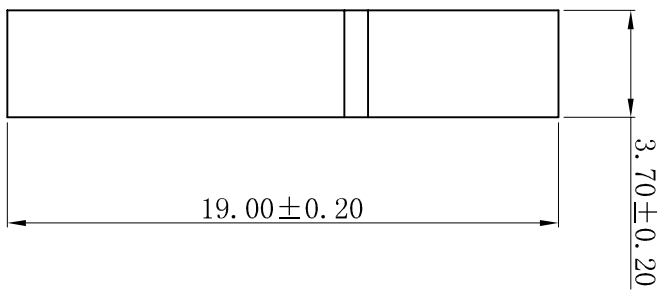
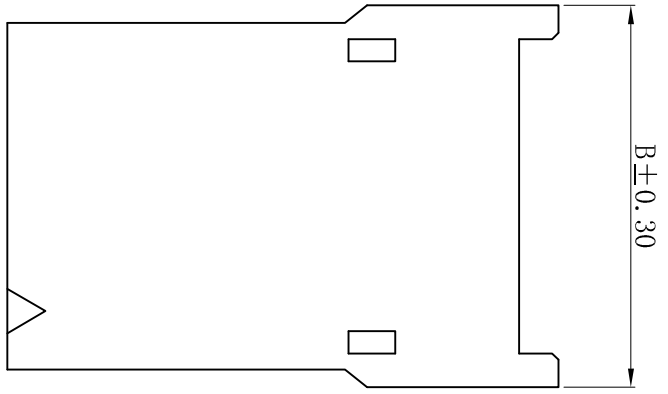


RoHS

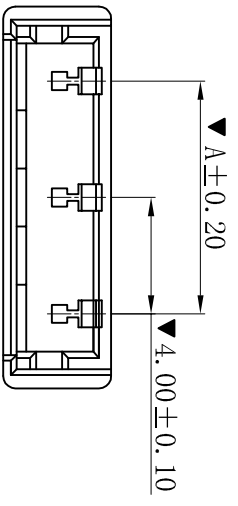

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 1800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : H4001-1xNP
- Poles : 02-05P
- Housing Material : PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	4.00	9.10
03	8.00	13.10
04	12.00	17.10
05	16.00	21.10

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRIPTION	DATE	APPRO.

版次 REV.	1
版次 REV.	2
版次 REV.	3
版次 REV.	4
版次 REV.	5
版次 REV.	6
版次 REV.	7
版次 REV.	8
版次 REV.	9
版次 REV.	10

投影法 Projection	第一角	
单位 Unit	MM	
比例/Scale	1:1	
大小/SIZE	A4	
页码/SHEET	1/1	
版本/Rev	D	
品名 (PART NAME)	BH4.00mm Female Housing Connector Series	
料号 (PART NO)	H4001-1xNP	
状态码	C	