
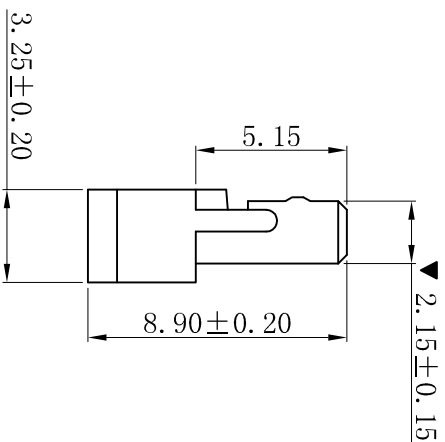
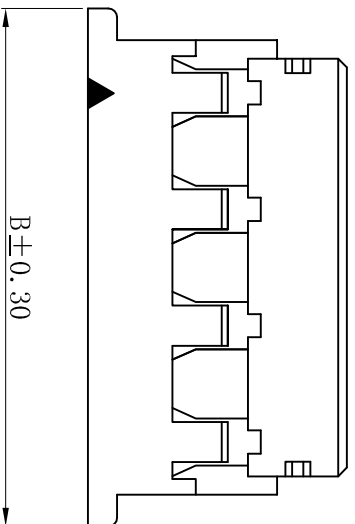
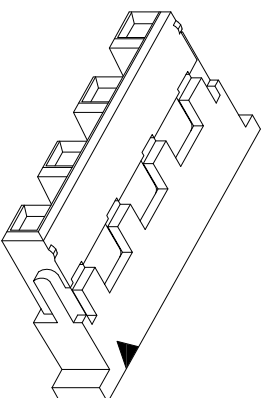


RoHS

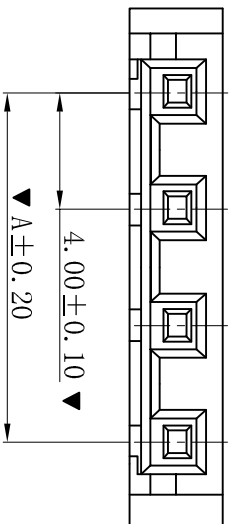

- SPECIFICATIONS**
- Voltage rating: 600V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 1800V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- HOUSING**
- Part No. : H4002-1xNP
 - Poles : 02-05P
 - Housing Material: PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	4.00	9.80
03	8.00	13.80
04	12.00	17.80
05	16.00	21.80

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
1	说明	日期	承认
	DESCRIPTION	DATE	APPRO.

一般公差 GENERAL TOLERANCE:		0±0.30
		.0±0.25
		.00±0.20
		.000±0.05
角度/ANGLE:		±1 $^{\circ}$
绘图/DR	审核/CHECK	胡进
批准/APPRO	日期/DATE	2019-06-03

投影法 Projection		第一角法
单位/Unit	比例/Scale	1:1
大小/SIZE	页码/SHEET	1/1
版本/Rev	版本号	D
品名 (PART NAME)		BH4.00mm Male Housing
料号 (PART NO)		H4002-1xNP
状态码		C

XYDZ[®] 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

Connectors



BH4.00mm Male Housing
Connector Series