





RoHS

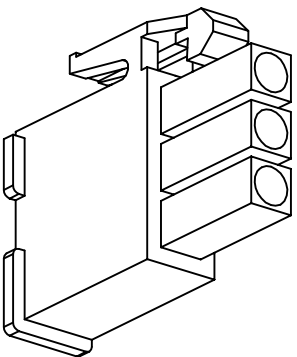



H4141-01P

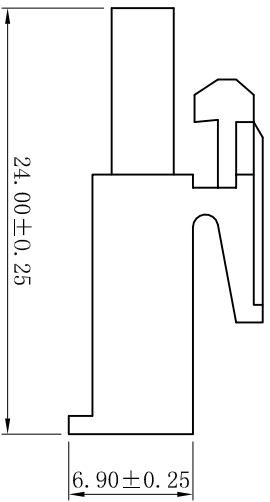


- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25 °C ~ +85 °C
- HOUSING
- Part No. : H4141-1xNP
 - Poles : 01-03P
 - Housing Material : PA66 UL94V-2 or UL94V-0
 - The Dimension Marked “▼” Must Be Recorded



H4141-02P

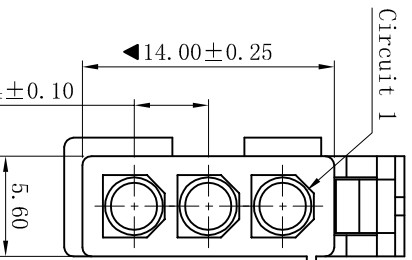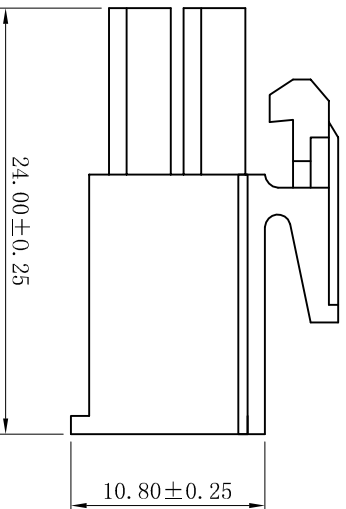

H4141-03P

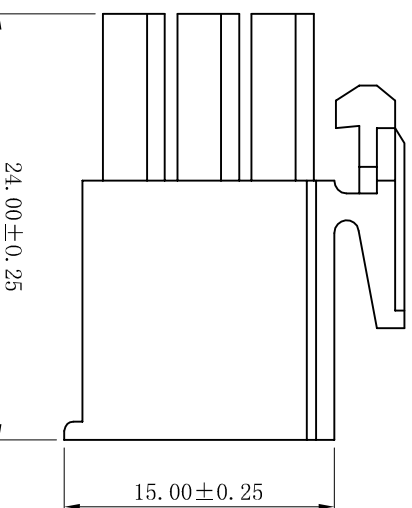

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE: 0±0.30 .00±0.25 .000±0.05		投影法 Projection 单位 Unit MM		品名 (PART NAME)		AMP 4.14mm Male Housing Connector Series	
修打版本		2015-11-04		陈雄军		ANGLE: ±1°		审核/CHK		陈雄军		料号 (PART NO)	
变更图宽格式内容		2013-12-27		陈雄军		绘图/DR		核准/APPRO		胡进		H4141-1xNP	
新版本		2011-05-24		陈雄军		日期/DATE		日期/DATE		2019-06-03		版本号	
说明		DESCRPTION		APPRO.		承认		版本/Rev		D		状态码	
版次		REV.		1		1		C					

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd