
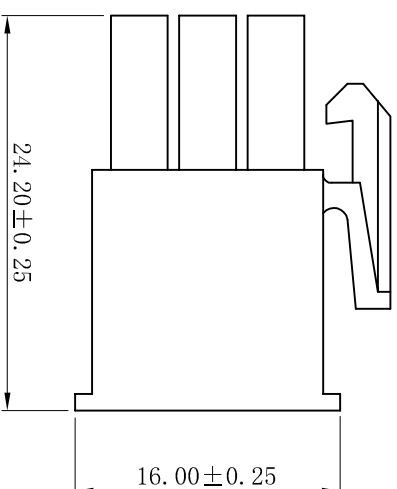
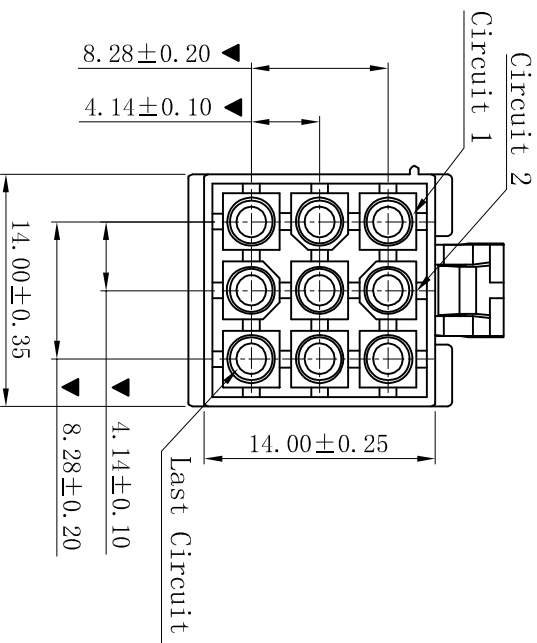


RoHS

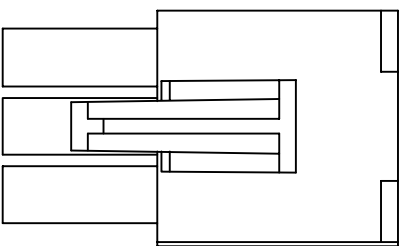

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25° C +85° C
- HOUSING
- Part No. : H4141-3x03P
 - Poles : 09P
 - Housing Material : PA66 UL94V-2 or UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-06-03	陈雄军							
C	修打版本	2015-11-04	陈雄军							
B	变更图宽格式内容	2013-12-27	陈雄军							
A	新版本	2011-05-24	陈雄军							
H	说明	日期	承认							
1	版次	REV.	APPRO.							
1	1	2	3	4	5	6	7	8	9	10

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	胡进
日期/DATE	2019-06-03

<p>XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd</p>	
投影法 Projection	品名 (PART NAME)
单位 Unit MM	AMP 4.14mm Male Housing
比例/Scale 1:1	Connector Series
大小/Size A4	
页码/SHEET 1/1	料号 (PART NO)
版本/Rev D	H4141-3x03P
	状态码 C