
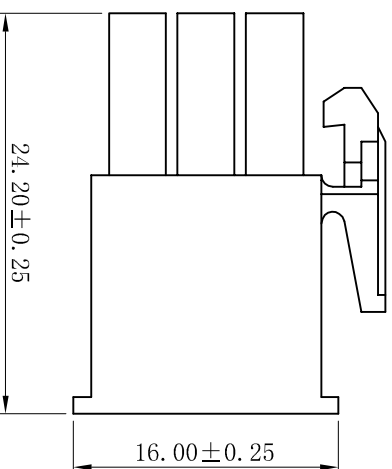
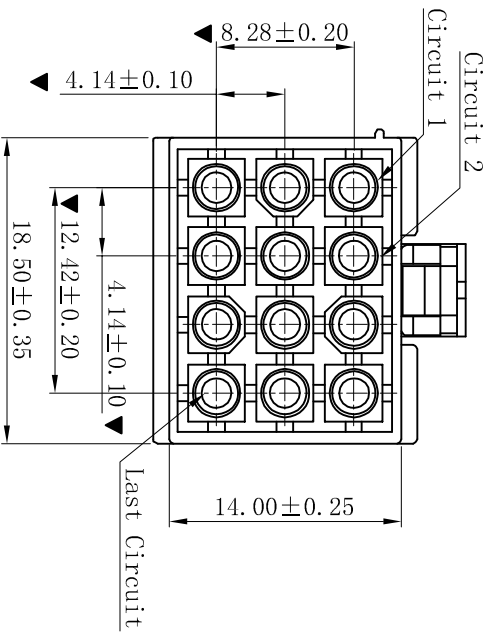


RoHS

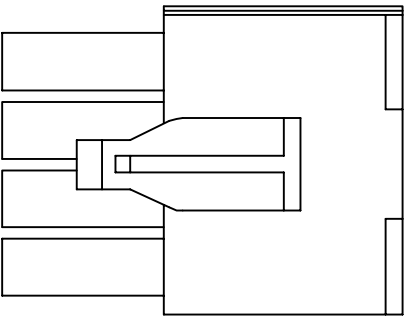

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : H4141-3x04P
- Poles : 12P
- Housing Material : PA66 UL94V-2 or UL94V-0
- The Dimension Marked “▲” Must Be Recorded

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection		品名 (PART NAME)		AMP 4.14mm Male Housing Connector Series	
修订版本		2015-11-04		陈雄军		绘图/DR		▲ 角度: ±1°		单位 Unit		MM			
变更图宽格式内容		2013-12-27		陈雄军		审核/CHECK		陈雄军		比例/Scale		1:1			
新版本		2011-05-24		陈雄军		批准/APPRO		胡进		大小/Size		A4		料号 (PART NO)	
说明 DESCRIPTION		日期 DATE:		承认 APPRO.		日期/DATE		2019-06-03		页码/SHEET		1/1		H4141-3x04P	
版次 REV.		1		1		2		3		4		5		6	

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

状态码  
C