
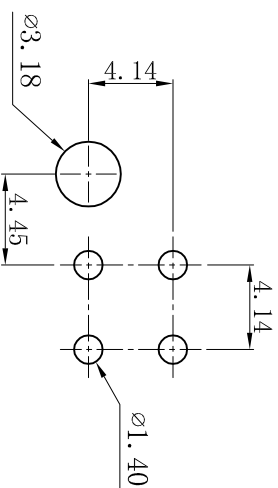
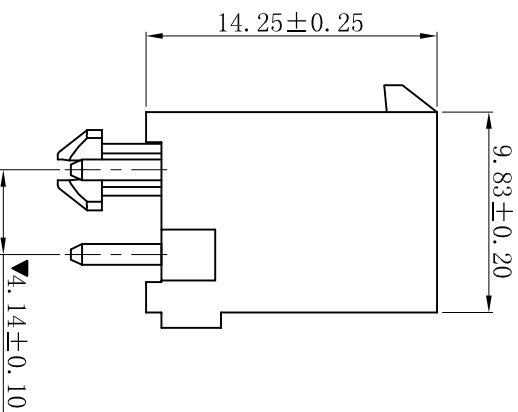


RoHS

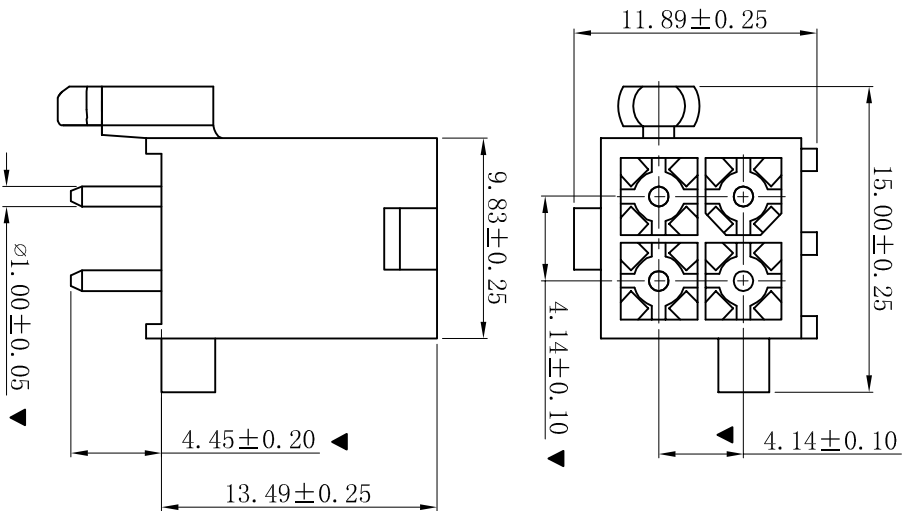

P.C.B LAYOUT: TOP VIEW  
TOLERANCE: ±0.05mm

- SPECIFICATIONS**
- Voltage rating: 600V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25°C~+85°C
  - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W4141V-2x02P
  - Poles: 04P
  - Housing Material: PA66 UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: ANGLE: ±1°	0±0.30 .0±0.25 .00±0.20 .000±0.05
C	修订版本	2015-11-04	陈雄军	绘图/DR	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHK	陈雄军
A	新版本	2011-05-24	陈雄军	批准/APPRO	胡进
版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期/DATE	2019-06-03

<p><b>XYDZ® 东莞市祥运连接器有限公司</b> Dongguan Xiangyun Connectors CO., Ltd</p>	
<p>投影法 Projection 单位 Unit MM</p>	<p>品名 (PART NAME) AMP 4.14mm 180° 2x2P Wafer Connector Series</p>
<p>比例/Scale 1:1</p>	<p>料号 (PART NO) W4141V-2x02P</p>
<p>大小/Size A4</p>	<p>状态码 C</p>
<p>页码/SHEET 1/1</p>	
<p>版本/Rev D</p>	