
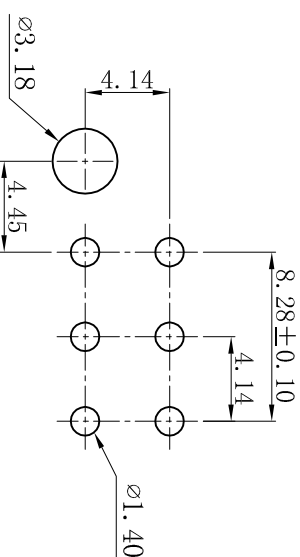
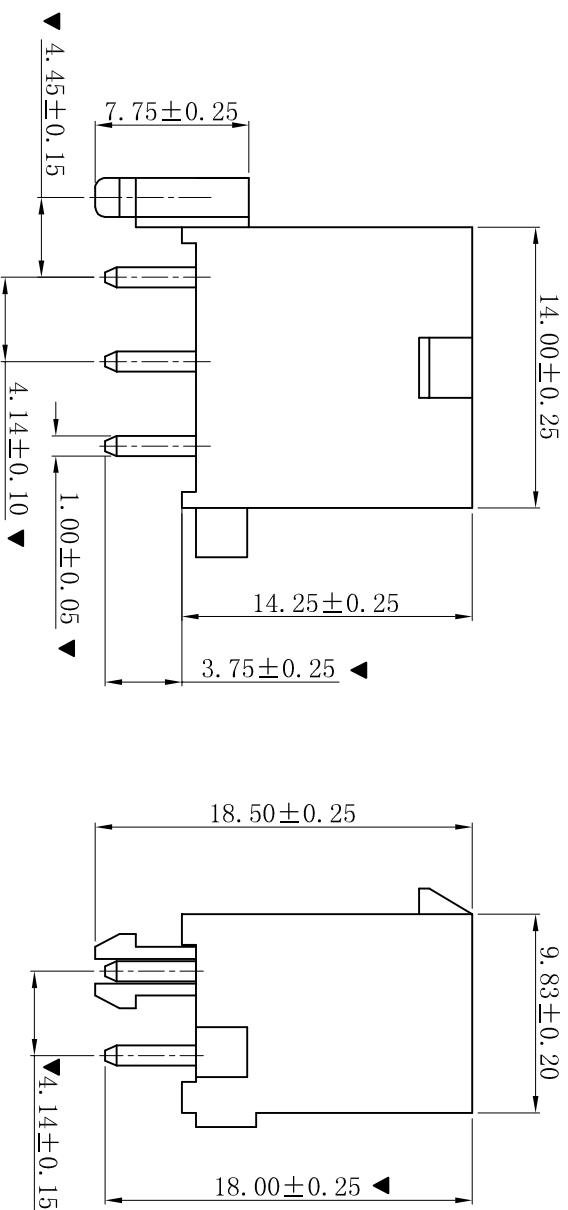
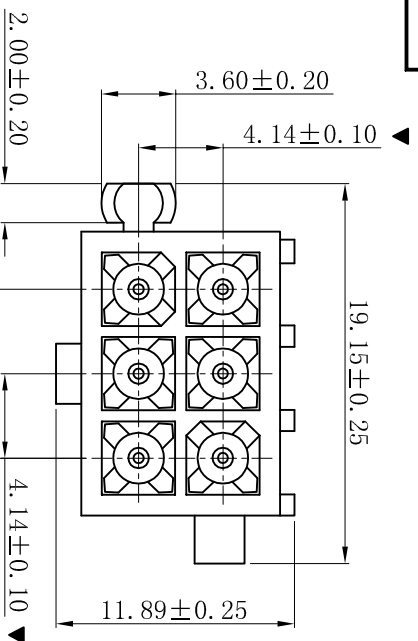


ROHS



P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4141V-2x03P
 - Poles: 06P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-06-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	变更图宽格式内容
B	新版本	2013-12-27	陈雄军	新版本
A	说明	2011-05-24	陈雄军	说明
版次	DESCRIPTION	日期	APPRO.	REV.
1				
2				
3				
4				

一般公差		0±0.30
GENERAL TOLERANCE:		.00±0.25
		.000±0.05
ANGLE: ±1°		
绘图/DR	陈雄军	陈雄军
审核/CHECK	胡进	胡进
批准/APPRO		
日期/DATE	2019-06-03	

投影法		第一角
Connectors		
XVDZ® 东莞市祥运连接器有限公司		
Dongguan Xiangyun Connectors CO., Ltd		
品名	AMP 4.14mm 180° 2x3P Wafer	
(PART NAME)	Connector Series	
料号	W4141V-2x03P	
(PART NO)		
单位	MM	
比例/Scale	1:1	
大小/Size	A4	
页码/Sheet	1/1	
版本/Rev	D	
状态码	C	