
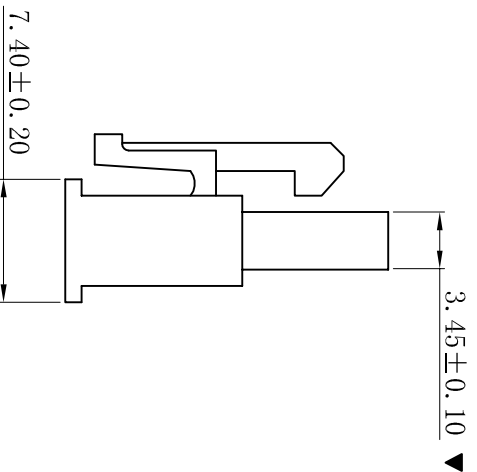
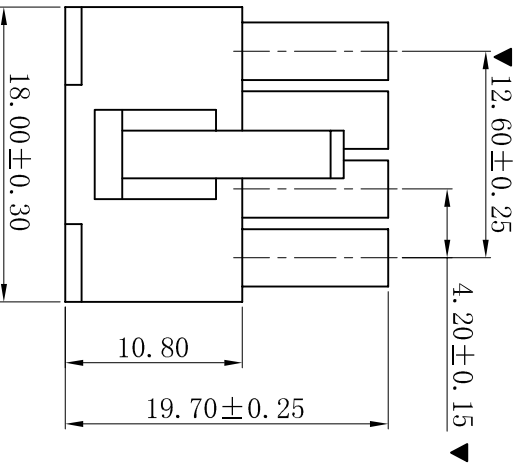


RoHS

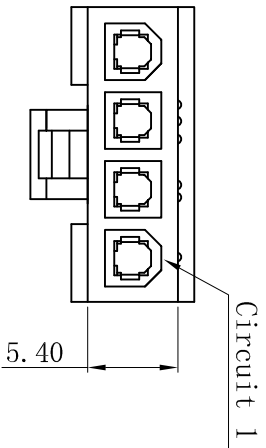

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No. : H4201-1x04P-2F2Y
 - Poles: 04P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Mates With: H4202 dual row receptacle
 - Use With: T4202 terminals
 - The Dimension Marked “▼” Must Be Recorded

一般公差		0±0.30
GENERAL TOLERANCE:		.00±0.25
		.000±0.05
ANGLE: ±1°		

更新图面		2019-07-03	PP, Duow	绘图/DR		PP, Duow	XYDZ® 东莞市祥运连接器有限公司	
新版本		2019-04-23	PP, Duow	审核/CHECK		陈雄军	Dongguan XiangYun Connectors CO., Ltd	
说明		日期	承认	核准/APPRO		胡进	投影法	
DESCRIPTION		DATE:	APPRO.	日期/DATE		2019-07-03	单位 Unit	
							MM	
							比例/Scale	
							1:1	
							大小/Size	
							A4	
							页码/Sheet	
							1/1	
							版本/Rev	
							B	
							品名	
							(PART NAME)	
							Malelex 4.20mm 特殊孔位2F2Y	
							Male Housing Connector Series	
							料号	
							(PART NO)	
							H4201-1X04P-2F2Y	
							状态码	
							C	