
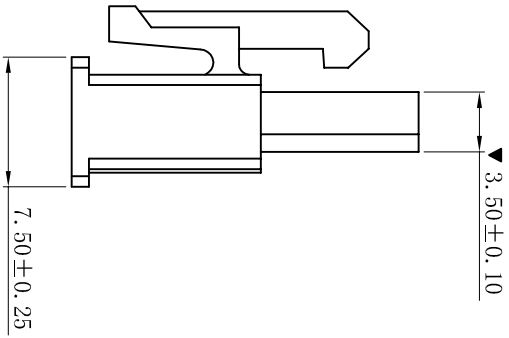
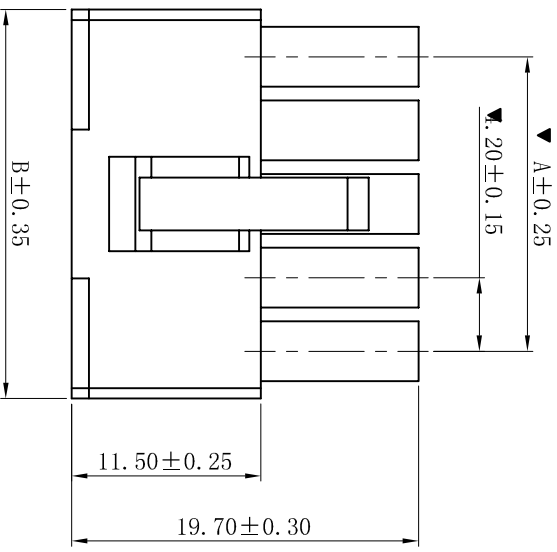
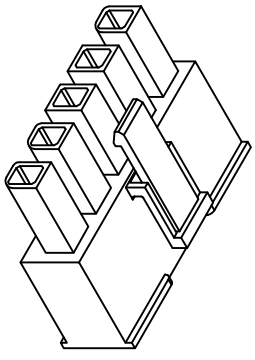


RoHS

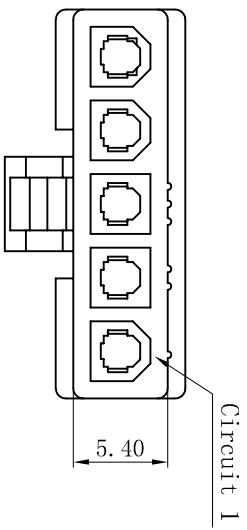


■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No.: H4201-1xNP-X-LS
- Poles: 02-06P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Mates With: H4202 and W4202 Single Row Connectors
- Use With: T4202 Terminal
- The Dimension Marked “▼” Must Be Recorded

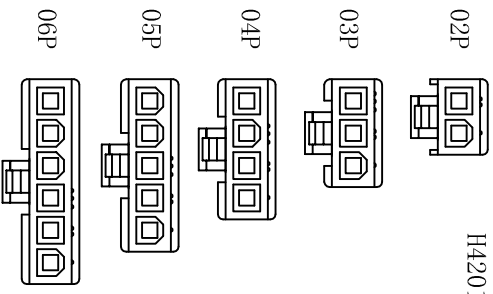

H4201-1xNP-X-LS

None: PA66-V2 Natural
BK: PA66-V2 Black
V0: PA66-V0 Natural
V0BK: PA66-V0 Black

Part No.	Dimensions (mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

CIRCUIT SIZE LAYOUT

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

Connectors

Molex 4.20mm Male
Housing Connector Series

投影法 Projection	品名 (PART NAME)	料号 (PART NO)	状态码
第一角画法 1:1		H4201-1xNP-X-LS	C
单位 Unit	大小/Scale		
MM	A4		
比例/Scale	页码/SHEET		
1:1	1/1		
审核/CHECK	日期/DATE		
陈雄军	2019-07-03		
批准/APPRO	版本/Rev		
胡进	D		

D	更新图画	2015-11-04	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明		承认
版次	DESCRIPTION	日期	APPRO.
REV.		DATE.	

1 2 3 4 5 6 7 8 9 10