
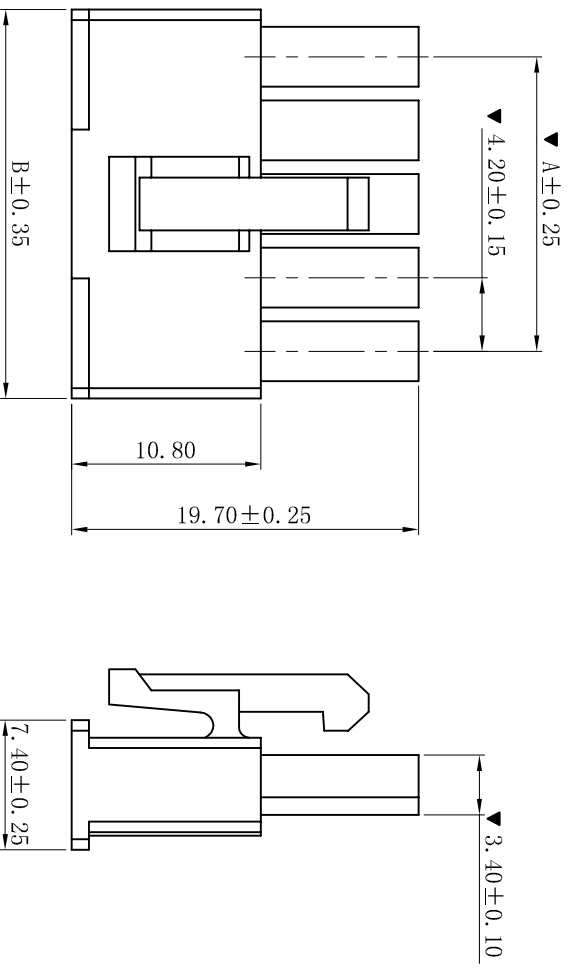
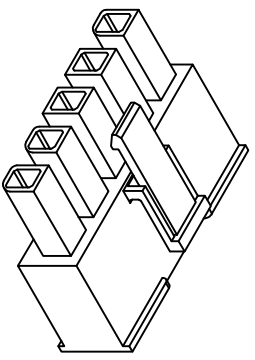


RoHS

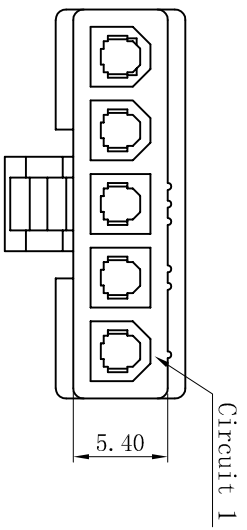


■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No.: H4201-1xNP-X
- Poles: 02-06P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Mates With: H4202 and W4202 Single Row Connectors
- Use With: T4202 Terminals
- The Dimension Marked “▼” Must Be Recorded

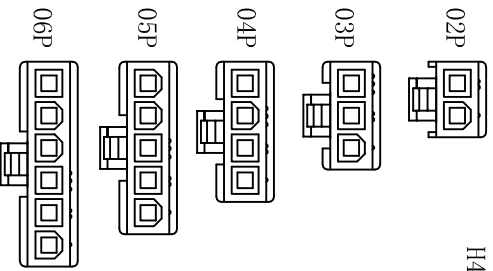

None: PA66-V2 Natural
BK: PA66-V2 Black
V0: PA66-V0 Natural
V0BK: PA66-V0 Black

Part No.	Dimensions (mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

CIRCUIT SIZE LAYOUT

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

一般公差
GENERAL TOLERANCE:
0±0.30
.0±0.25
.00±0.20
ANGLE: ±1°

投影法
Projection

品名
(PART NAME)

Molex 4.20mm Male

审核/CHKC
陈雄军

单位 Unit
MM

比例/Scale
1:1

Housing Connector Series

日期/DATE
2019-07-03

核准/APPRO
胡进

大小/Size
A4

料号
(PART NO)
H4201-1xNP-X

日期/DATE
2011-05-24

页码/SHEET
1/1

版本/New
D

状态码
C

说明
DESCRIPTION

日期/DATE
2015-11-04

更新画面
更新图面

变更图宽格式内容
修订版本

日期/DATE
2015-11-04

审核/CHKC
陈雄军

更新画面
更新图面

变更图宽格式内容
修订版本

日期/DATE
2011-05-24

核准/APPRO
陈雄军

说明
DESCRIPTION

版本/New
D

状态码
C