
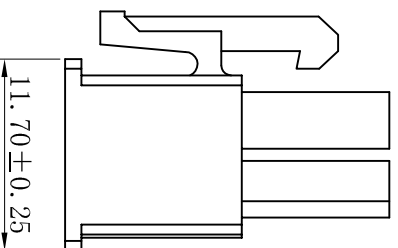
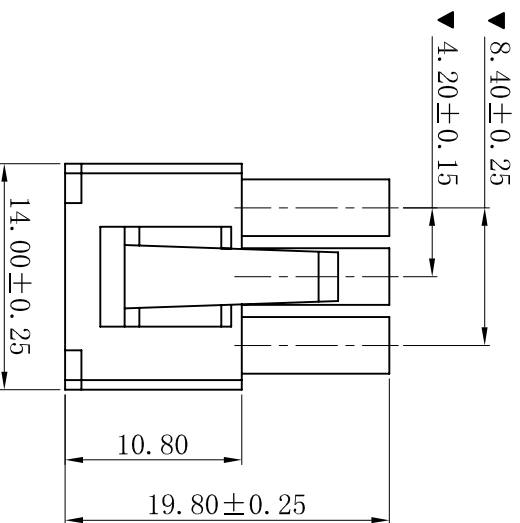


ROHS

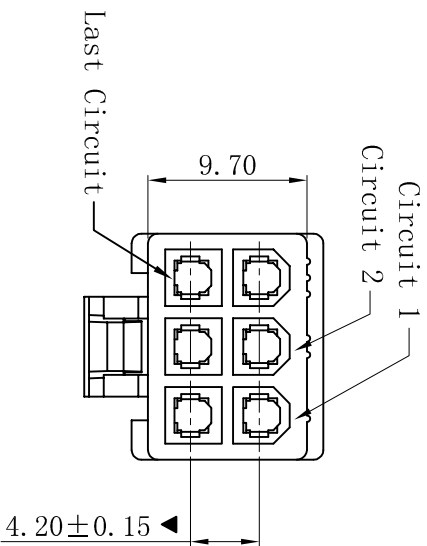

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No. : H4201-2x03P-3F3Y-BK
 - Poles: 06P
 - Housing Material: PA66 UL94V-2 Black
 - Mates With: H4202 dual row receptacle
 - Use With: T4202 Terminal
 - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-07-03	PP, Duaw	一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05	投影法 Projection		品名 (PART NAME)		Molex 4.20mm 3F3Y Male	
新版本		2019-04-23	PP, Duaw	审核/CHECK		陈雄军	单位 Unit		料号 (PART NO)		Housing Connector Series	
说明 DESCRIPTION		日期 DATE	承认 APPRO.	日期/DATE		胡进	比例/Scale		H4201-2x03P-3F3Y-BK		状态码 C	
更新图面		2019-07-03	PP, Duaw	日期/DATE		2019-07-03	大小/Size		A4			
新版本		2019-04-23	PP, Duaw	日期/DATE		2019-07-03	页码/Sheet		1/1			
说明 DESCRIPTION		日期 DATE	承认 APPRO.	日期/DATE		2019-07-03	版本/Rev		B			

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

Connectors



MM

1:1

A4

1/1

1 2 3 4 5 6 7 8 9 10