
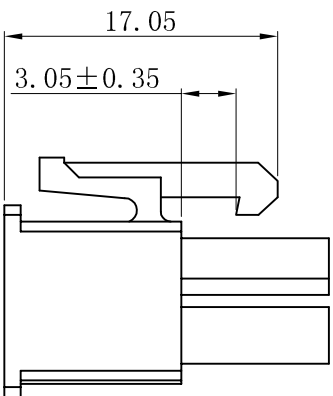
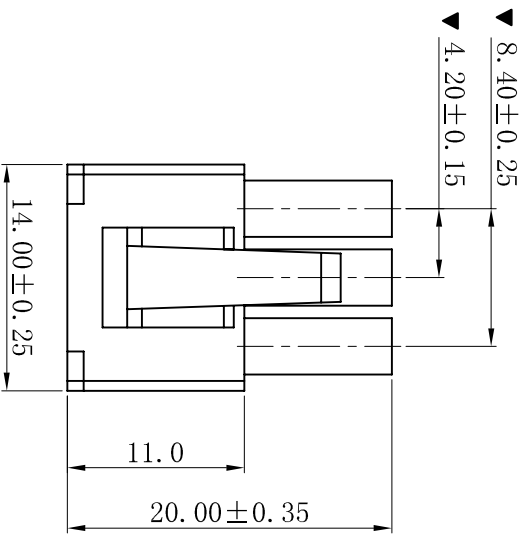


RoHS

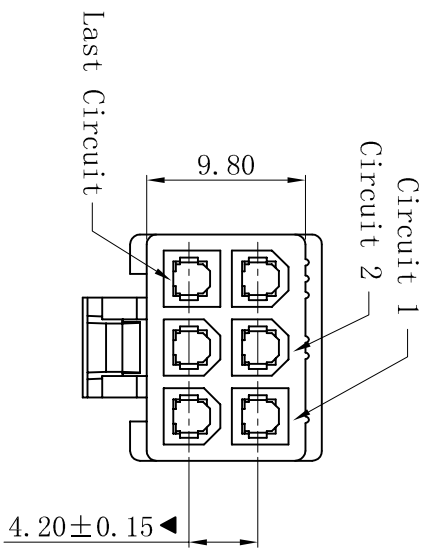

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- HOUSING
- Part No. : H4201-2x03P-PCI-BK-ZL
 - Poles: 06P
 - Housing Material: PA66 UL94V-2 Black
 - Mates With: H4202 dual row receptacle
 - Use With: T4202 Terminal
 - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-07-03	PP/Duan	一般公差		0±0.30
新版本		2019-04-23	PP/Duan	GENERAL TOLERANCE:		.00±0.25
说明		日期	承认	ANGLE: ±1 $^{\circ}$.000±0.05
DESCRPTION		DATE:	APPRO.			

XYDZ [®] 东莞市祥运连接器有限公司		投影法		品名		料号	状态码
Dongguan XiangYun Connectors CO., Ltd		Connectors		(PART NAME)			
Molex 4.20mm PCI Male		单位 Unit		大小/Scale		H4201-2x03P-PCI-BK-ZL	
Housing Connector Series		比例/Scale		页码/SHEET		C	
		审核/CHECK		日期/DATE			
		批准/APPRO		版本/Rev			
		胡进					
		2019-07-03					