
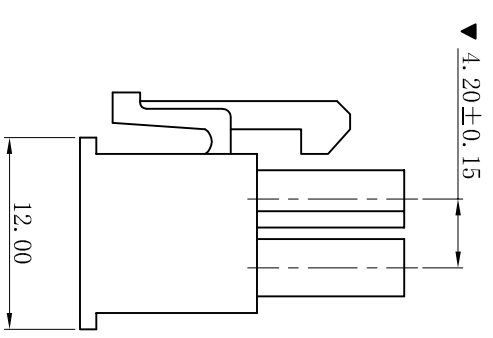
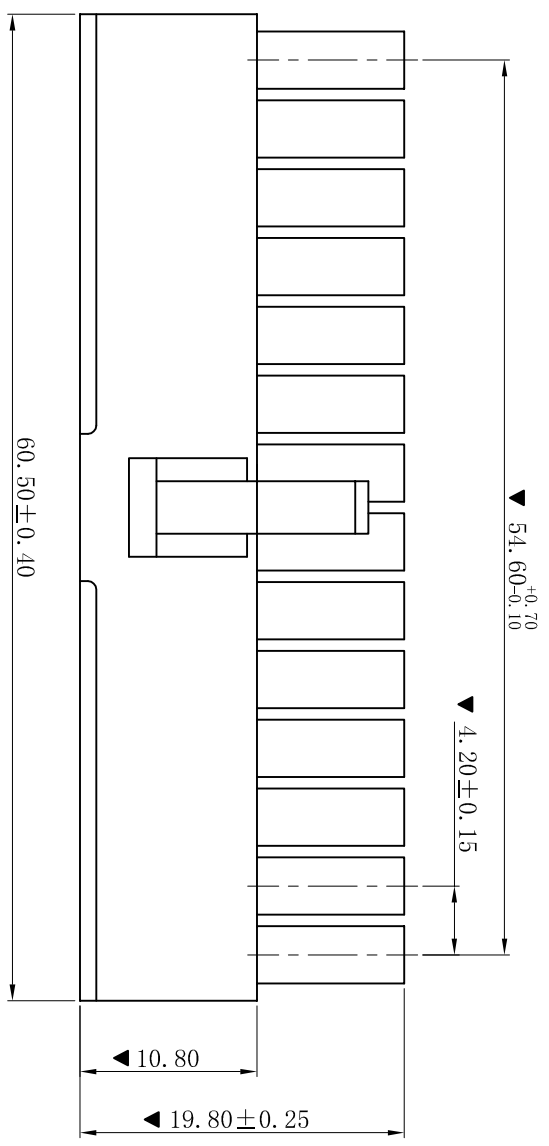


RoHS

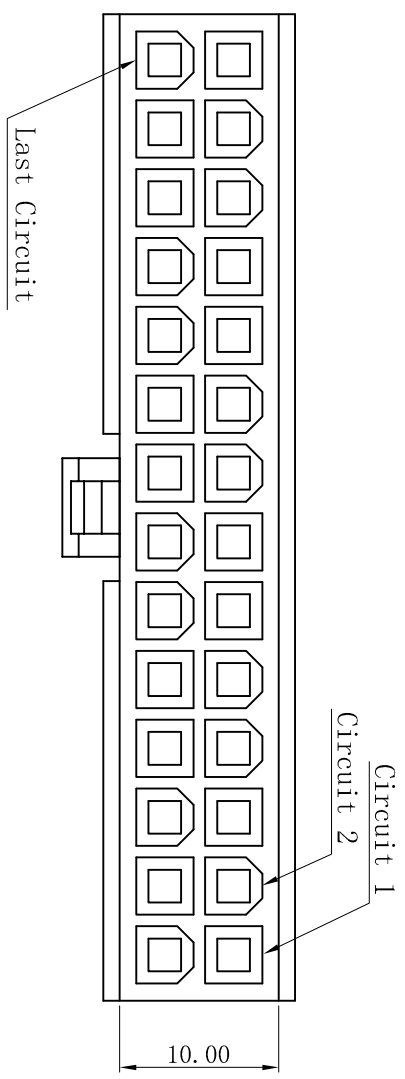

- SPECIFICATIONS**
- Voltage rating: 600V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- HOUSING**
- Part No.: H4201-2x14P-BK
  - Poles: 28P
  - Housing Material: PA66 UL94V-2 Black
  - Mates With: W4202 dual row connectors
  - The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-07-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
C	修订版本	2015-11-04	陈雄军	绘图/DR	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHECK	胡进
A	新版本	2011-05-24	陈雄军	批准/APPRO	胡进
H	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期/DATE
1					2019-07-03
2					
3					
4					
5					
6					

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法  
Projection

单位 Unit  
MM

比例/Scale  
1:1

大小/Size  
A4

页码/Sheet  
1/1

版本/Rev  
D

品名  
(PART NAME)  
Molex 4.20mm Male Housing  
Connector Series

料号  
(PART NO)  
H4201-2x14P-BK

状态码  
C