



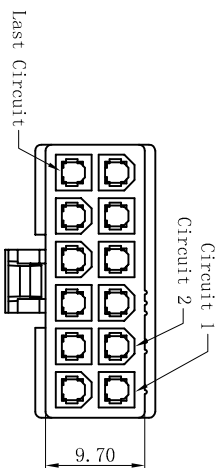
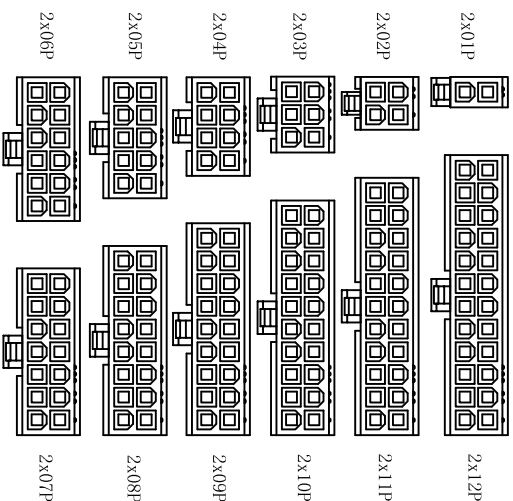
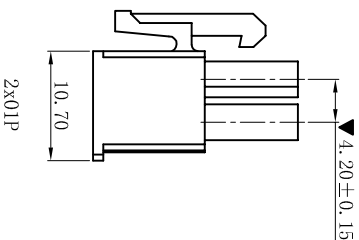
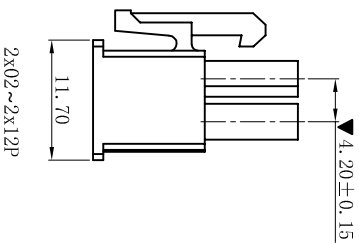


ROHS HF



- SPECIFICATIONS**
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- HOUSING**
- Part No.: H4201-2xNP-V0BL-HF
 - Poles: 02-24P
 - Housing Material: PA66 UL94V-0 Blue, HALOGEN FREE
 - Mates With: H4202 and W4202 Dual Row Connectors
 - Use With: T4202 Terminal
 - The Dimension Marked “▼” Must Be Recorded

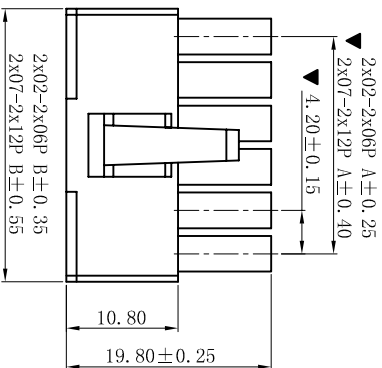

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

XYDZ[®] 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

一般公差
GENERAL TOLERANCE:
0±0.30
.0±0.25
.00±0.20
.000±0.05
ANGLE: ±1 $^{\circ}$

Connectors

Molex 4.20mm Male
Housing Connector Series

绘图/DR	陈雄军	审核/CHECK	陈雄军	日期/DATE	2019-07-03
变更图宽格式内容	2013-12-27	陈雄军	2011-05-24	陈雄军	承认
新版本	说明	DESCRPTION	版次	REV.	1

投影法 Projection	第一角	单位 Unit	MM	比例/Scale	1:1	大小/Size	A4	页码/Sheet	1/1	版本/Rev	D
品名 (PART NAME)	Molex 4.20mm Male Housing Connector Series					料号 (PART NO)	H4201-2xNP-V0BL-HF				
状态码	C										

更新图面	2019-07-03	陈雄军	更新图面	2019-07-03	陈雄军
修订版本	2015-11-04	陈雄军	修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军	新版本	2011-05-24	陈雄军
说明	DESCRPTION	版次	REV.	1	1