




# RoHS

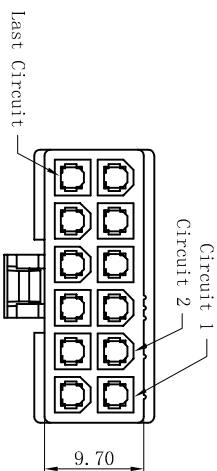

None: PA66-V2 Natural  
 BK: PA66-V2 Black  
 V0: PA66-V0 Natural  
 V0BK: PA66-V0 Black








H4201-2xNP-X

### SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

### HOUSING

- Part No.: H4201-2xNP-X
- Poles: 02-24P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Mates With: H4202 and W4202 Dual Row Connectors
- Use With: T4202 Terminal
- The Dimension Marked "▼" Must Be Recorded

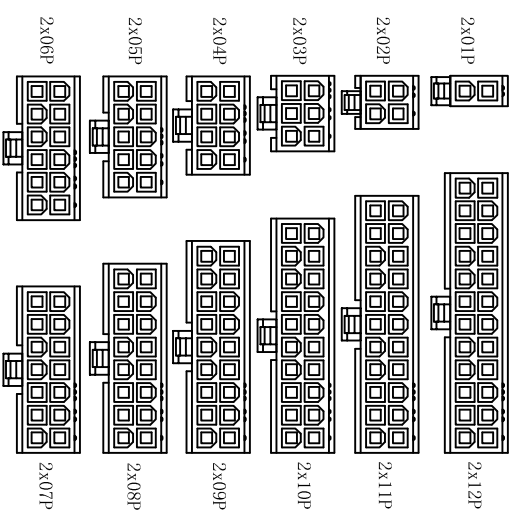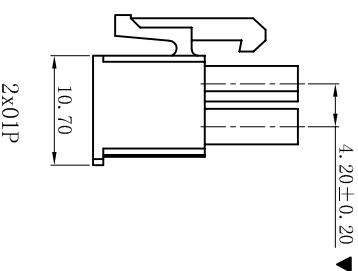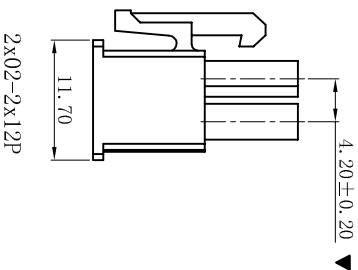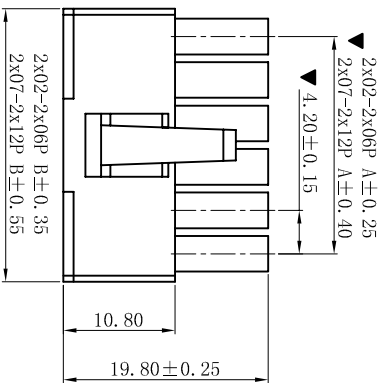

### CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan Xiangyun Connector s CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 -0±0.25 .00±0.20 .000±0.05
角度/ANGLE:	±1°

更新图面	2019-07-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图规格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRPTION	DATE:	APPRO.

投影法 Projection	第一角	品名 (PART NAME)	Molex 4.20mm Male
单位 Unit	MM	料号 (PART NO)	H4201-2xNP-X
比例/Scale	1:1	状态码	C
大小/Size	A4		
页码/SHEET	1/1		
版本/Rev	D		

版次 REV.	1	2	3	4	5	6	7	8	9	10
------------	---	---	---	---	---	---	---	---	---	----