
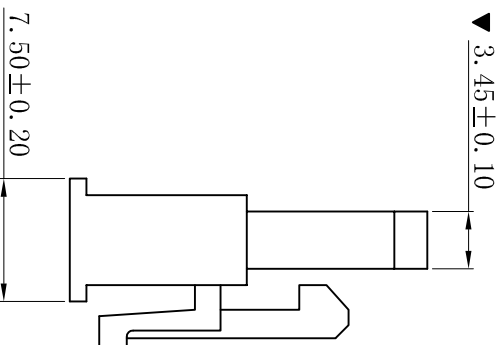
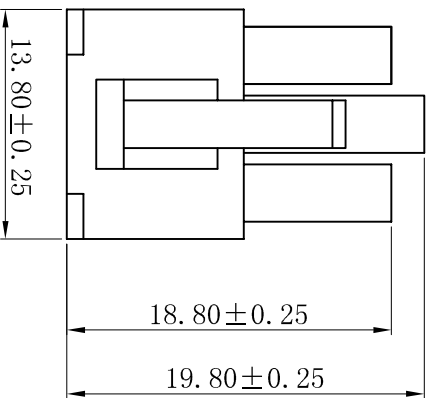


RoHS

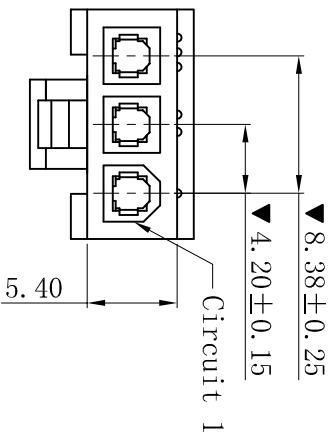

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- HOUSING
- Part No. : H4201G-1x03P
- Poles: 03P
- Housing Material: PA66 UL94V-2
- Mates With: H4202 dual row receptacle
- Use With: T4202 Terminal
- The Dimension Marked “▼” Must Be Recorded

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
绘图/DR	PP, Duow
审核/CHECK	陈雄军
批准/APPRO	胡 进
日期/DATE	2019-07-03

投影法 Projection	第一角法
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	B

品名 (PART NAME)	Molex 4.20mm 特殊高凸 Male Housing Connector Series
料号 (PART NO)	H4201G-1x03P
状态码	C

更新图面	2019-07-03	PP, Duow
新版本	2019-04-23	PP, Duow
说明 DESCRIPTION	日期 DATE	承认 APPRO.

版次 REV.	1	2	3	4	5	6	7	8	9	10
------------	---	---	---	---	---	---	---	---	---	----