


PCB CUTOFF PANEL THICKNESS 1.27

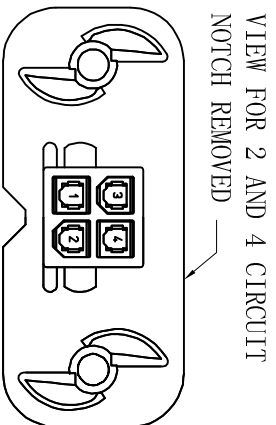

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No.: H4201L-2xNP-X
- Poles: 04-24P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Mates With: H4202L Dual Row Receptacle
- Use With: T4202L Terminal
- The Dimension Marked “▲” Must Be Recorded

H4201L-2xNP-X

- None: PA66-V2 Natural
- BK: PA66-V2 Black
- V0: PA66-V0 Natural
- V0BK: PA66-V0 Black

Part No.	Dimensions (mm)				
	A	B	C	D	E
2x01	36.00	25.00	13.40	8.70	
2x02	4.20	40.20	29.20	17.60	12.90
2x03	8.40	44.40	33.40	21.80	17.10
2x04	12.60	48.60	37.60	26.00	21.30
2x05	16.80	52.80	41.80	30.20	25.50
2x06	21.00	57.00	46.00	34.40	29.70
2x07	25.20	61.20	50.20	38.60	33.90
2x08	29.40	65.40	54.40	42.80	38.10
2x09	33.60	69.60	58.60	47.00	42.30
2x10	37.80	73.80	62.80	51.20	46.50
2x11	42.00	78.00	67.00	55.40	50.70
2x12	46.20	82.20	71.20	59.60	54.90

D	更新图面	2019-07-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
C	修订版本	2015-11-04	陈雄军	绘图/DR	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHECK	陈雄军
A	新版本	2011-05-24	陈雄军	批准/APPRO	胡进
H	版次 REV.	1	说明 DESCRIPTION	日期 DATE	承认 APPRO.

XYDZ® 东莞市祥运连接器有限公司 Dongguan Xiangyun Connectors CO., Ltd	
投影法 Projection 	单位名称 Unit MM
比例/Scale 1:1	大小/Size A4
页码/Sheet 1/1	版本/Rev D
品名 (PART NAME) Molex 4.20mm 螺旋桨 Male Housing Connector Series	料号 (PART NO) H4202L-2xNP-X 状态码 C