
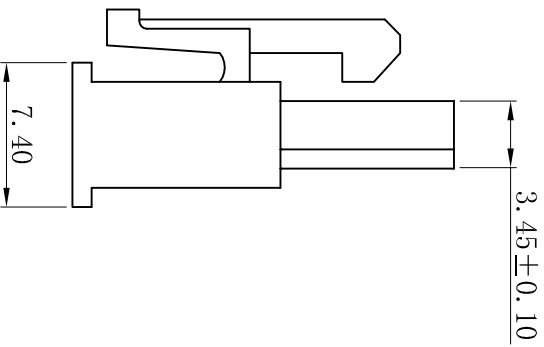
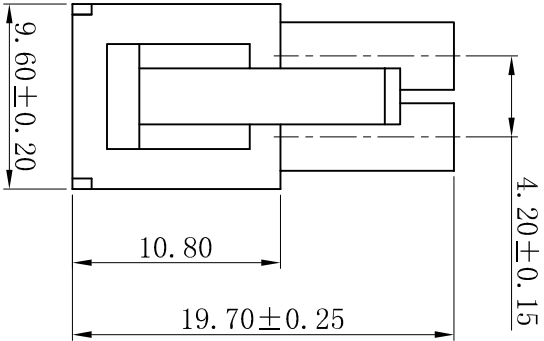


RoHS

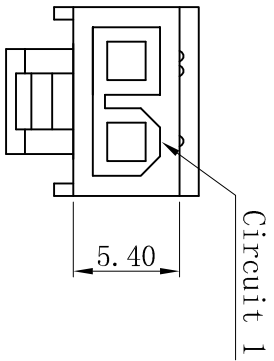

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No. : H4201LK-1x02P
- Poles: 02P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Mates With: H4202 and W4202 single row connectors
- Use With: T4202 Terminal
- The Dimension Marked “ ” Must Be Recorded

更新图面		2019-07-03		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection		品名 (PART NAME)		Molex 4.20mm Male Housing Connector Series									
修订版本		2015-11-04		陈雄军		绘图/DR		陈雄军		MM													
变更图宽格式内容		2013-12-27		陈雄军		审核/CHECK		陈雄军		1:1													
新版本		2011-05-24		陈雄军		批准/APPRO		胡进		A4		料号 (PART NO)		H4201LK-1x02P									
说明 DESCRIPTION		日期 DATE		承认 APPRO.		日期/DATE		2019-07-03		页码/SHEET		版本/REV		D									
版次 REV.		1		1		2		3		4		5		6		7		8		9		10	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

连接器
Connectors

状态码
C