
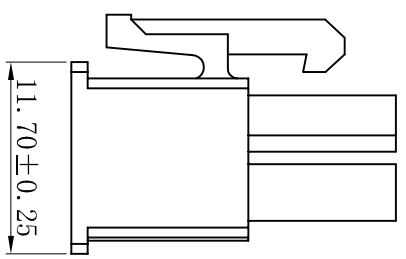
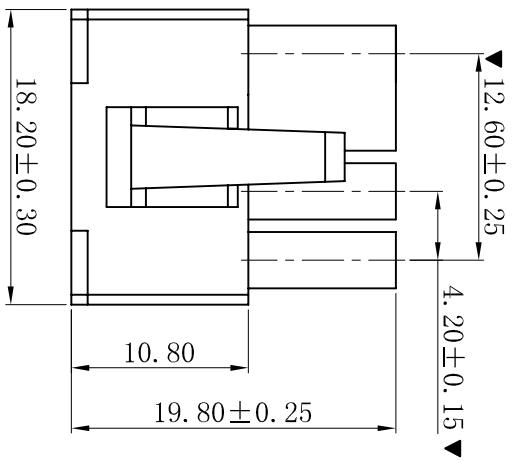


RoHS

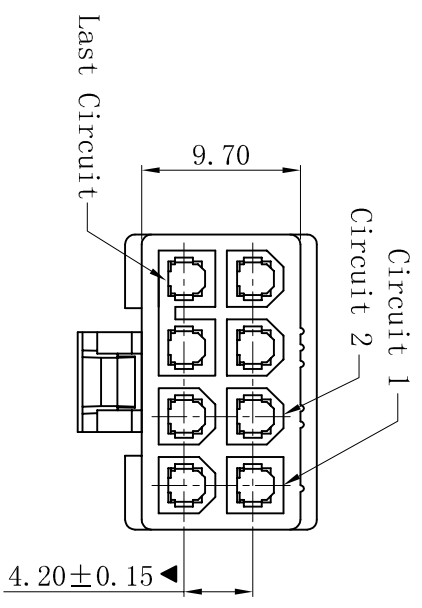

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No. : H4201LK-2x04P-BK
 - Poles: 08P
 - Housing Material: PA66 UL94V-2 Black
 - Mates With: H4202 dual row receptacle
 - Use With: T4202 Terminal
 - The Dimension Marked “▼” Must Be Recorded

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	B

更新图面 更新圖面		2019-07-03	PP, Duaw	日期/DATE		2019-07-03	料号 (PART NO)		Mollex 4.20mm 七八连体 Male Housing Connector Series	状态码 C
新版本 新圖本		2019-04-23	PP, Duaw	日期/DATE		2019-07-03	料号 (PART NO)		H4201LK-2x04P-BK	
说明 說明				日期/DATE			料号 (PART NO)			
DESCRPTION				日期/DATE			料号 (PART NO)			
承認				日期/DATE			料号 (PART NO)			
承認				日期/DATE			料号 (PART NO)			