
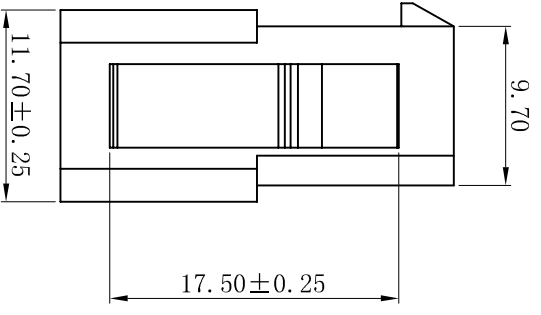
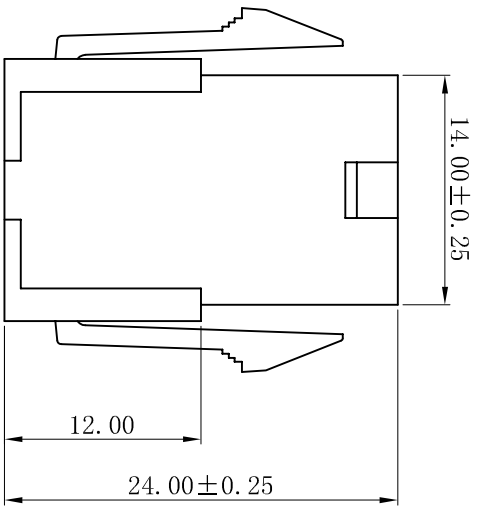


RoHS

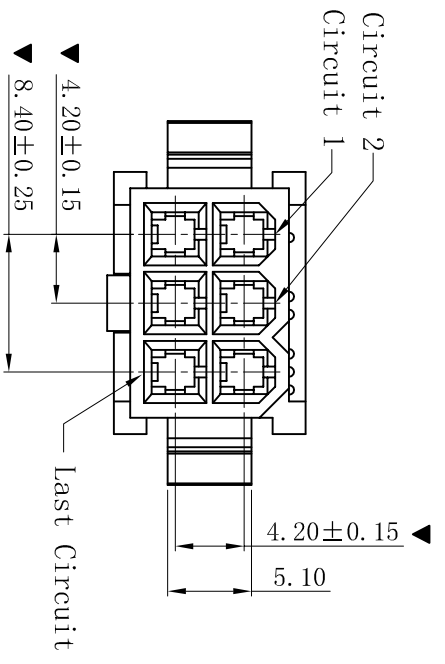

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000M $\Omega$  min
  - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- HOUSING
- Part No. : H4202-2x03P-3F3Y-BK
  - Poles: 06P
  - Housing Material: PA66 UL94V-2 Black
  - Mates With: H4201 dual row receptacle
  - Use With: T4201 Terminal
  - The Dimension Marked “▼” Must Be Recorded

**XYDZ<sup>®</sup> 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:		0±0.30 .00±0.25 .000±0.05	投影法 Projection		品名 (PART NAME)		Molex 4.20mm 3F3Y Female Housing Connector Series	状态码 C
ANGLE: ±1 $^{\circ}$			单位 Unit		料号 (PART NO)		H4202-2x03P-3F3Y-BK	
绘图/DR		XYDZ	比例/Scale		大小/Size		A4	
审核/CHECK		陈雄军	核准/APPRO		页码/SHEET		1/1	
日期/DATE		2019-07-03	日期/DATE		版本/Rev		B	
更新图面		2019-07-03	承认/APPRO.		版本/Rev		B	
新版本		2019-04-23	承认/APPRO.		版本/Rev		B	
说明 DESCRIPTION			承认/APPRO.		版本/Rev		B	
版次 REV.			承认/APPRO.		版本/Rev		B	
1			承认/APPRO.		版本/Rev		B	
2			承认/APPRO.		版本/Rev		B	
3			承认/APPRO.		版本/Rev		B	
4			承认/APPRO.		版本/Rev		B	
5			承认/APPRO.		版本/Rev		B	
6			承认/APPRO.		版本/Rev		B	
7			承认/APPRO.		版本/Rev		B	
8			承认/APPRO.		版本/Rev		B	
9			承认/APPRO.		版本/Rev		B	
10			承认/APPRO.		版本/Rev		B	