
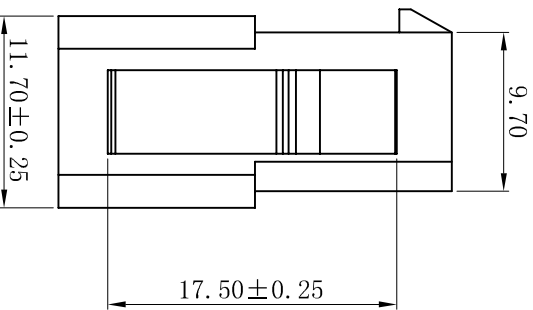
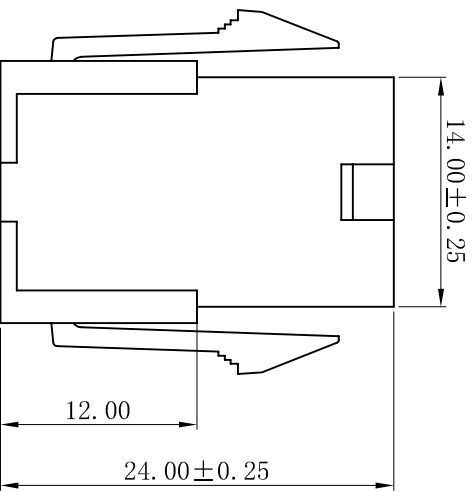


RoHS

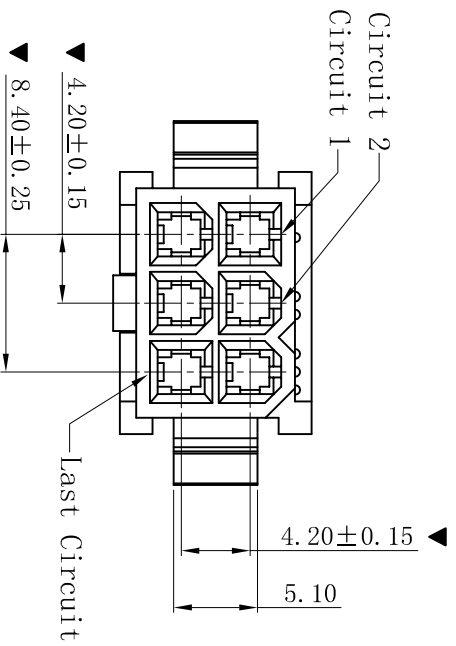

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max
- HOUSING
- Part No. : H4202-2x03P-PCI-BK
- Poles: 06P
- Housing Material: PA66 UL94V-2 Black
- Mates With: H4201 dual row receptacle
- Use With: T4201 Terminal
- The Dimension Marked “▼” Must Be Recorded

更新图面	2019-07-03	PP, Duaw
新版本	2019-04-23	PP, Duaw
说明	日期	承认
DESCRIPTION	DATE	APPRO.

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05 ANGLE: ±1°
绘图/DR	PP, Duaw
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-07-03

XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd Connectors	
投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	B
品名 (PART NAME)	Molex 4.20mm PCI Female Housing Connector Series
料号 (PART NO)	H4202-2x03P-PCI-BK
状态码	C