

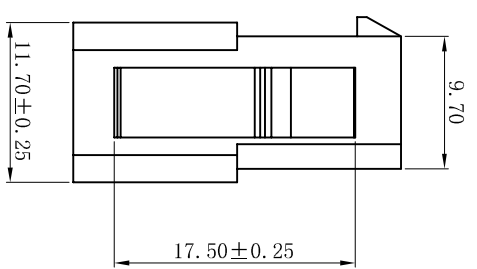
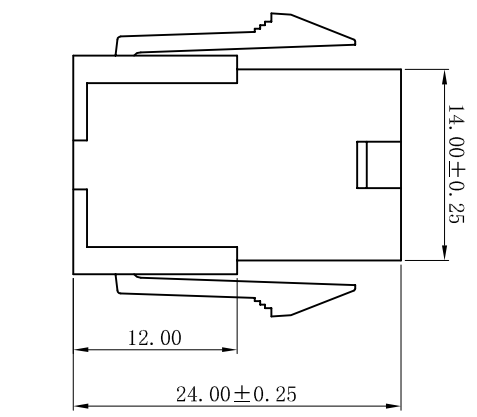




ROHS

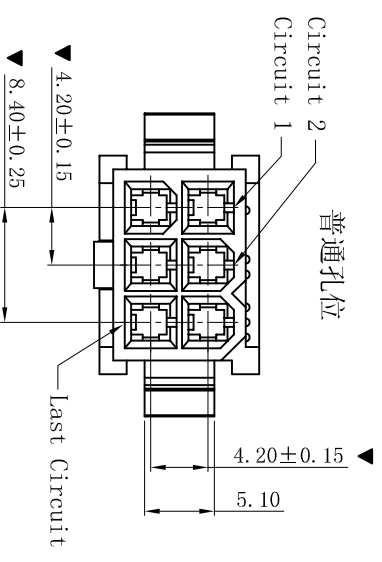

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No.: H4202-2x03P-X-XX
- Housing Material: Nylon66 UL94V-2 or UL94V-0
- Mates With: H4201 dual row receptacle
- Use With: T4201 terminals
- The Dimension Marked “▼” Must Be Recorded

H4202-2x03P-X-X X

None: 普通孔位  
 PCI: 2方4圆孔位  
 3F3Y: 3方3圆孔位

XX: 颜色参照对照表  
 INSTULATOR / COLOR

None: Pa66-V2 Natural  
 BK: Pa66-V2 Black  
 V0: Pa66-V0 Natural  
 V0BK: Pa66-V0 Black

颜色对照表

颜色	料号编码	蓝色	BL
本色	None	棕色	OE
黑色	BK	红色	RD
大红色	TR	黄色	YW
明红色	MR	绿色	GN
白色	WE	灰色	GY

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05
ANGLE: ±1°	

投影法 Projection	第一角投影 1 <sup>st</sup> Angle
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/Sheet	1/1
版本/Rev	B

品名 (PART NAME)	Molex 4.20mm Female Housing Connector Series
料号 (PART NO)	H4202-2x03P-X-XX
状态码	C

审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-07-03

更新图面	2019-07-03	PP. Duan
新版本	2019-04-23	PP. Duan
说明 DESCRIPTION	日期 DATE	承认 APPRO.

版次 REV.	1
------------	---

更新图面	2019-07-03	PP. Duan
新版本	2019-04-23	PP. Duan
说明 DESCRIPTION	日期 DATE	承认 APPRO.