


PANEL CUTOUT MAX PANEL 2.00 THICKNESS

H4202-2xNP-X

- None:Pa66-V2 Natural
- BK:Pa66-V2 Black
- V0:Pa66-V0 Natural
- V0BK:Pa66-V0 Black




■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No.: H4202-2xNP-X
- Poles: 02-24P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Mates With: H4201 Dual Row Receptacle
- Use With: T4201 Terminal
- The Dimension Marked “▲” Must Be Recorded

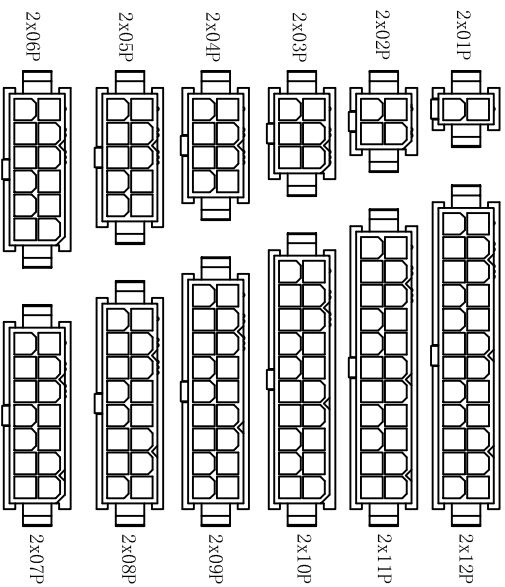

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)		
	A	B	C
2x01	--	5.60	10.80
2x02	4.20	9.80	15.00
2x03	8.40	14.00	19.20
2x04	12.60	18.20	23.40
2x05	16.80	22.40	27.60
2x06	21.00	26.60	31.80
2x07	25.20	30.80	36.00
2x08	29.40	35.00	40.20
2x09	33.60	39.20	44.40
2x10	37.80	43.40	48.60
2x11	42.00	47.60	52.80
2x12	46.20	51.80	57.00

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 -0.00±0.25 .000±0.20 ANGLE: ±1°
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-07-03

投影法: Projection Unit: MM

比例/Scale: 1:1

页码/SHEET: 1/1

版本/Rev: D

品名 (PART NAME): Molex 4.20mm Female Housing Connector Series

料号 (PART NO): H4202-2xNP-X

状态码: C

更新图面

2019-07-03

陈雄军

修订版本

2015-11-04

陈雄军

变更图宽格式内容

2013-12-27

陈雄军

新版本

2011-05-24

陈雄军

说明

DESCRPTION

承认

版次

REV.

1

2

3

4

5

6

7

8

9

10