
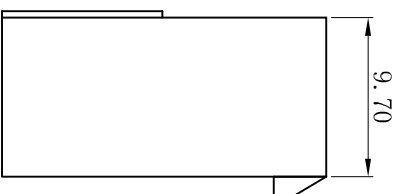
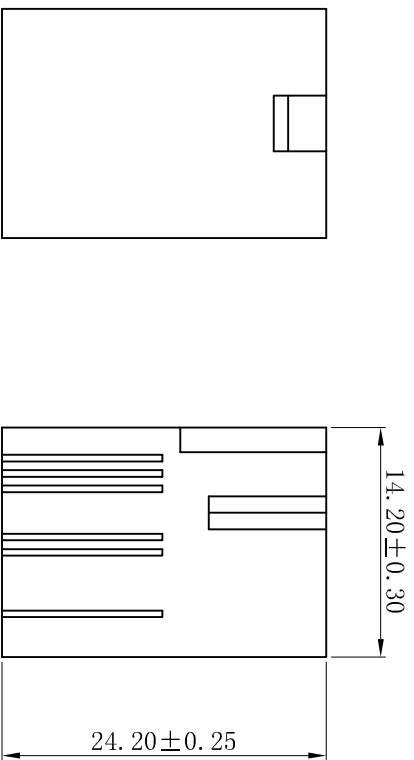


RoHS

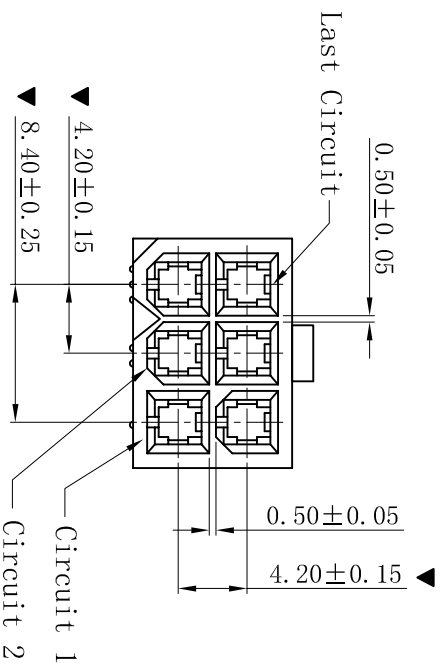

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : H4202C-2x03P-V0
- Poles: 06
- Housing Material: PA66 UL94V-0
- Mates With: H4201 dual row receptacle
- Use With: T4201 Terminal
- The Dimension Marked “▼” Must Be Recorded

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05
ANGLE: ±1°	

投影法 Projection	第一角投影法 First Angle Projection
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/Sheet	1/1
版本/Rev	B

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

品名 (PART NAME)	Molex 4.20mm 特殊无翅 Female Housing Connector Series
料号 (PART NO)	H4202C-2X03P-V0
状态码	C

更新图面 新版本	2019-07-03	PP. Duan	审核/CHKC	陈雄军
说明 DESCRIPTION	2019-04-23	PP. Duan	核准/APPRO	胡进
版次 REV.	1		日期/DATE	2019-07-03