
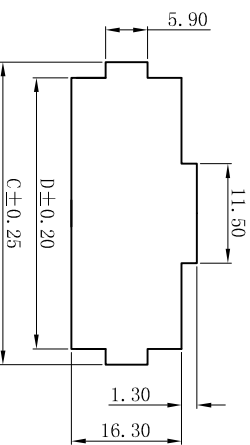
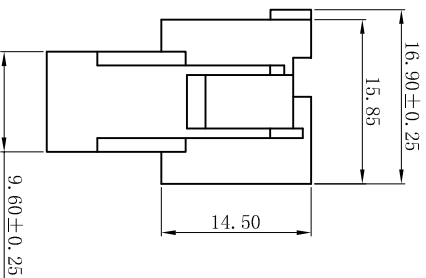
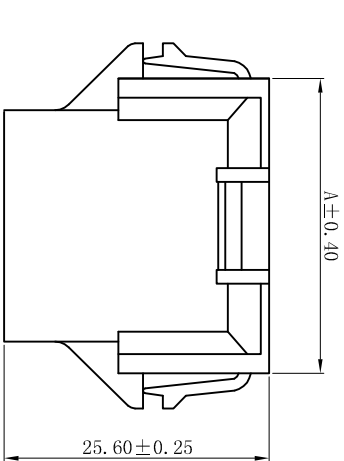



ROHS

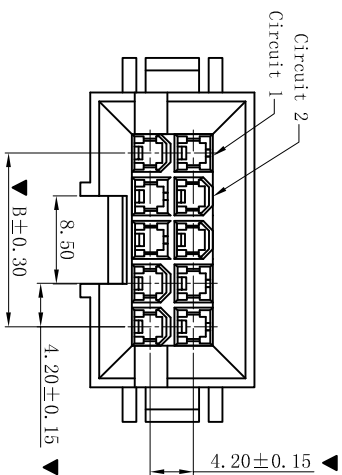

RECOMMENDED PCB CUTOUT
PANEL THICKNESS: 1.60

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No.: H4202L-2xNP-X
- Poles: 04-24P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Mates With: H4201L Dual Row Receptacle
- Use With: T4201L Terminals
- The Dimension Marked “▼” Must Be Recorded

H4202L-2xNP-X

None:Pa66-V2 Natural
BK:Pa66-V2 Black
V0:Pa66-V0 Natural
VOBK:Pa66-V0 Black

Part No.	Dimensions (mm)			
	A	B	C	D
2x02	15.80	4.20	19.80	16.30
2x03	20.00	8.40	24.00	20.50
2x04	24.20	12.60	28.20	24.70
2x05	28.40	16.80	32.40	28.90
2x07	36.80	25.20	40.80	37.30
2x09	45.20	33.60	49.20	45.70
2x10	49.40	37.80	53.40	49.90
2x12	57.80	46.20	61.80	58.30

D	更新图面	2019-07-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	变更图宽格式内容
B	变更图宽格式内容	2013-12-27	陈雄军	新版本
A	新版本	2011-05-24	陈雄军	说明
H	版次	说明	承认	版次
1	REV.	DESCRIPTION	APPRO.	1

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.20
	.000±0.05
ANGLE: ±1°	

绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-07-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector s CO., Ltd

投影法	第一角	品名	Molex 4.20mm 螺旋桨 Female
单位 Unit	MM	(PART NAME)	Housing Connector Series
比例/Scale	1:1	料号	H4202L-2xNP-X
大小/Size	A4	(PART NO)	
页码/Sheet	1/1	状态码	C
版本/Rev	D		