
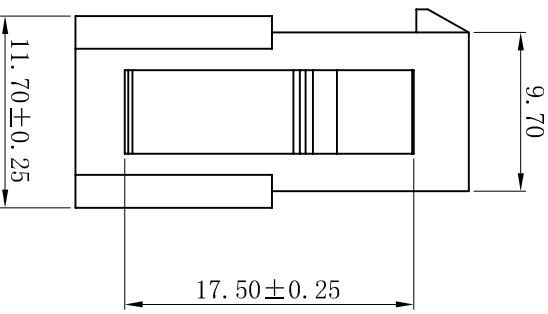
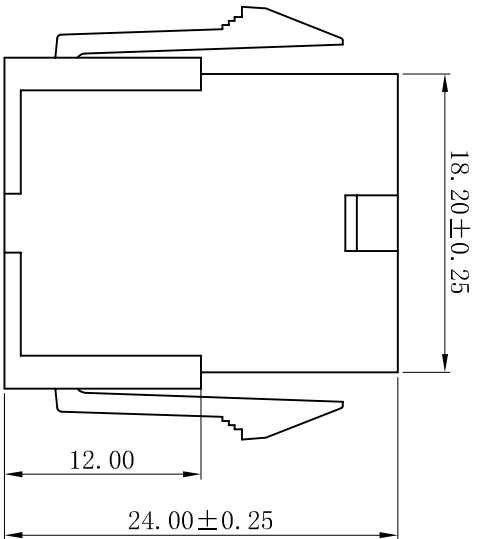


RoHS

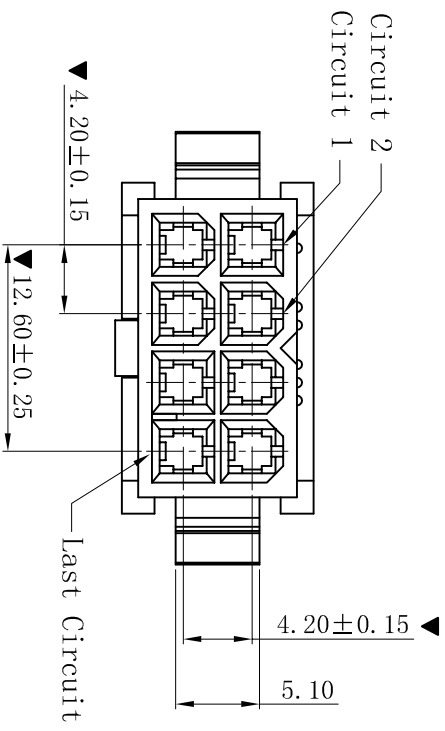

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No. : H4202LK-2x04P-BK
- Poles: 08P
- Housing Material: PA66 UL94V-2 Black
- Mates With: H4201 dual row receptacle
- Use With: T4201 Terminal
- The Dimension Marked “▼” Must Be Recorded

更新图面		2019-07-03	PP, Duaw	一般公差 GENERAL TOLERANCE:		0 ± 0.30 .00 ± 0.25 .000 ± 0.105	投影法 Projection		品名 (PART NAME)		Molex 4.20mm 七八连体 Female Housing Connector Series
新版本		2019-04-23	PP, Duaw	绘图/DR		ANGLE: ±1°	单位 Unit		(PART NO)		
说明 DESCRIPTION		日期 DATE:	承认 APPRO.	审核/CHECK		陈雄军		比例/Scale		料号 (PART NO)	
版次 REV.		1		核准/APPRO		胡进		大小/Size		H4202LK-2x04P-BK	
		1		日期/DATE		2019-07-03		页码/Sheet		状态码	
		2						版本/Rev		C	
		3									
		4									
		5									
		6									
		7									
		8									
		9									
		10									

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd