
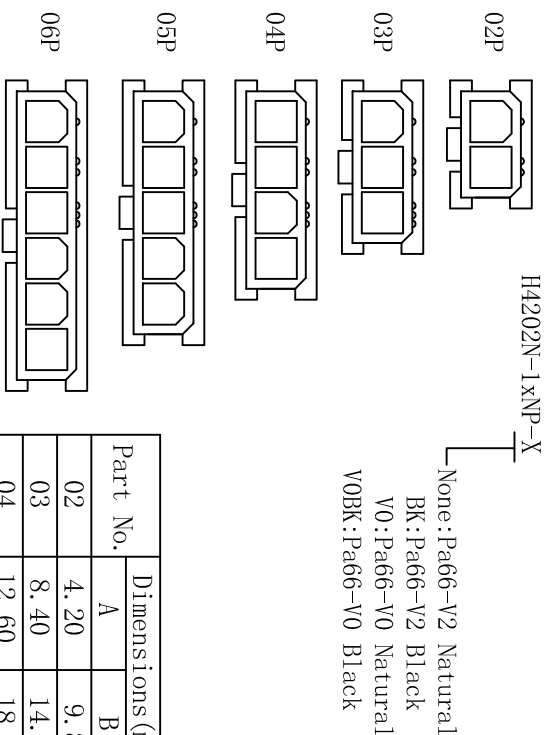
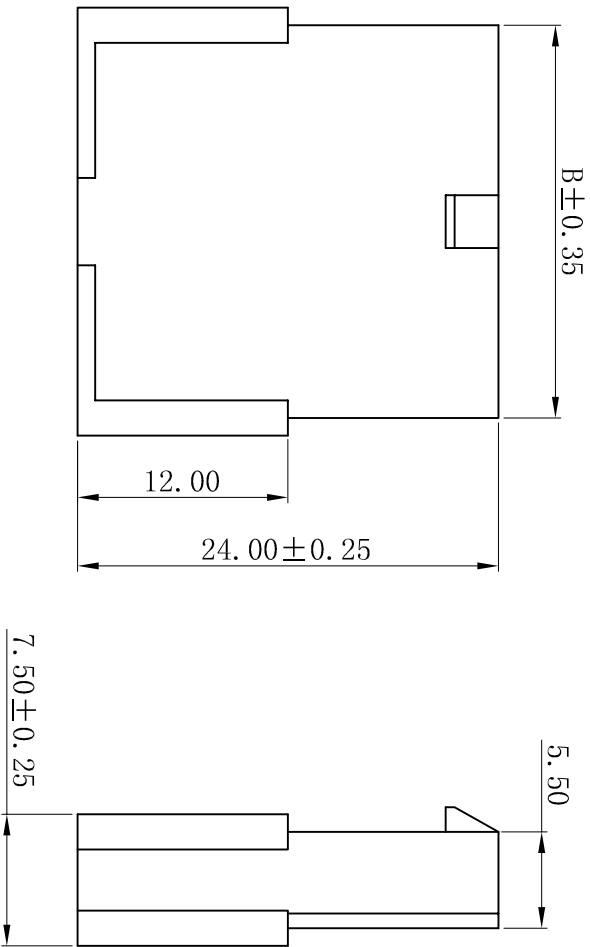



ROHS

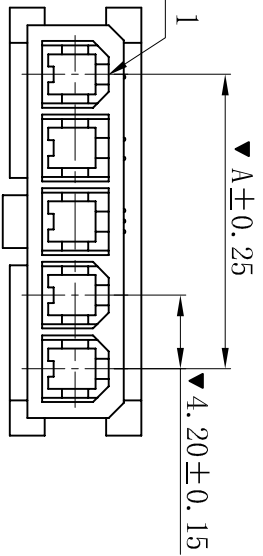

Part No.	Dimensions (mm)	
	A	B
02	4.20	9.80
03	8.40	14.00
04	12.60	18.20
05	16.80	22.40
06	21.00	26.60

- SPECIFICATIONS**
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING**
- Part No.: H4202N-1xNP-X
 - Poles: 02-06P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Mates With: H4201 Single Row Receptacle
 - Use With: T4201 Terminal
 - The Dimension Marked “▲” Must Be Recorded

D	更新图面	2019-07-03	陈雄军	更新图面	2019-07-03	陈雄军	胡进	2019-07-03
C	修订版本	2015-11-04	陈雄军	修订版本	2015-11-04	陈雄军	胡进	2019-07-03
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容	2013-12-27	陈雄军	胡进	2019-07-03
A	新版本	2011-05-24	陈雄军	新版本	2011-05-24	陈雄军	胡进	2019-07-03
H	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期 DATE	承认 APPRO.	日期 DATE	承认 APPRO.

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

Connectors

投影法: 单位: MM

比例/Scale: 1:1

大小/Size: A4

页码/Sheet: 1/1

版本/Rev: D

品名 (PART NAME): Molex 4.20mm 无翅Female Housing Connector Series

料号 (PART NO): H4202N-1xNP-X

状态码: C