
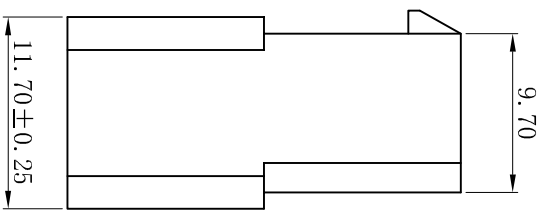
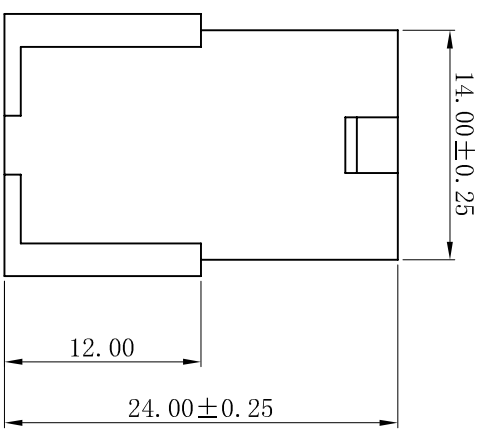


RoHS

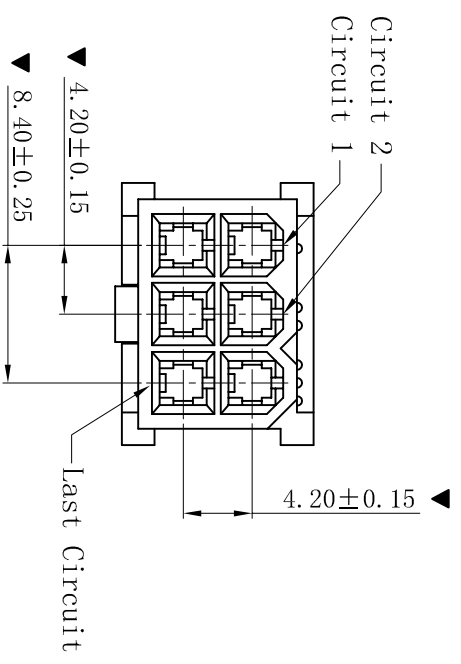

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No. : H4202N-2x03P-3F3Y-BK
- Poles: 06P
- Housing Material: PA66 UL94V-2 Black
- Mates With: H4201 dual row receptacle
- Use With: T4201 Terminal
- The Dimension Marked “▼” Must Be Recorded

A		1		2		3		4		5		6		7		8		9		10	
G																					
H		B		更新图面		2019-07-03		PP, Duaw		一般公差		0±0.30		投影法		品名		Molex 4.20mm 3F3Y 无翅 Female		状态码	
H		A		新版本		2019-04-23		PP, Duaw		GENERAL TOLERANCE:		.00±0.25		审核/CHKC		(PART NAME)		Housing Connector Series		C	
H		版次		说明		日期		承认		ANGLE: ±1°		.000±0.05		批准/APPRO		料号		H4202N-2x03P-3F3Y-BK			
H		REV.		DESCRIPTION		DATE		APPRO.		日期/DATE		2019-07-03		日期/DATE		(PART NO)					
G		1		1		2		3		4		5		6		7		8		9	
G		10		11		12		13		14		15		16		17		18		19	

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

Connectors  
 H4202N-2x03P-3F3Y-BK