
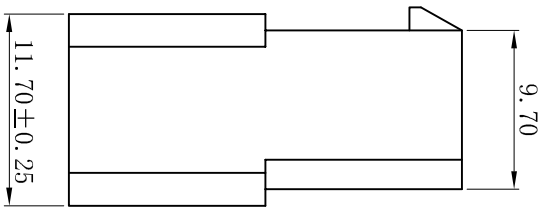
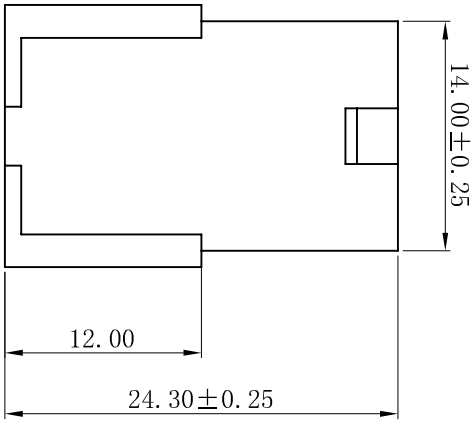


RoHS HF

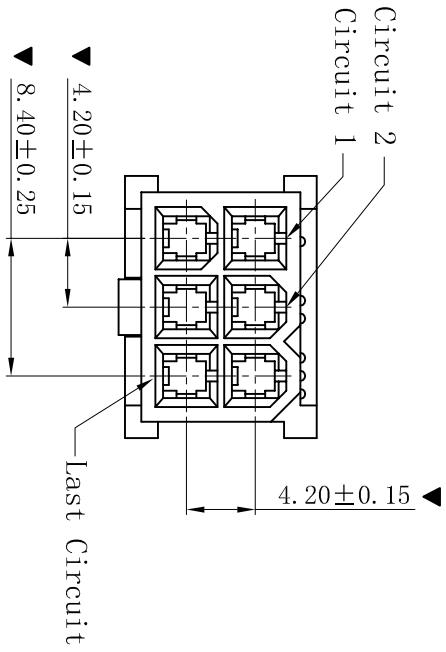

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C

■ HOUSING

- Part No. : H4202N-2x03P-BK-HF
- Poles: 06P
- Housing Material: PA66 UL94V-2 Black, HALOGEN FREE
- Mates With: H4201 dual row receptacle
- Use With: T4201 Terminal
- The Dimension Marked "▼" Must Be Recorded

					一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1 $^{\circ}$		投影法 Projection 		品名 (PART NAME) Molex 4.20mm 无翅 Female Housing Connector Series	
					绘图/DR P.P. Duaw		单位/Unit MM		料号 (PART NO.) H4202N-2x03P-BK-HF	
					审核/CHECK 陈雄军		比例/Scale 1:1		版本号 (PART NO.) C	
					批准/APPRO 胡进		大小/Size A4 1/1		状态码	
					日期/DATE 2019-07-03		页码/Sheet B			
					日期/DATE 2019-04-23		版本/Rev B			
					承认 APPRO. P.P. Duaw					
					更新图面 新版本					
					说明 DESCRIPTION					
					版本号 REV. 1					

XYDZ[®] 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd