


ROHS

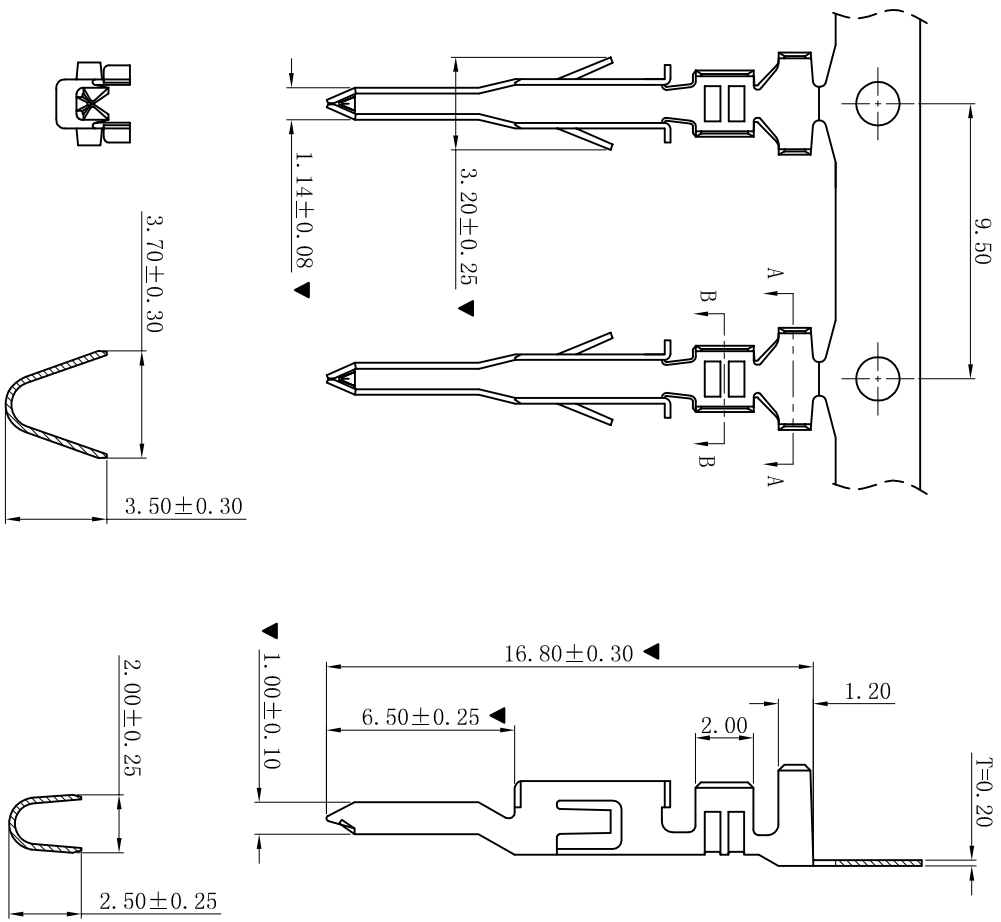


■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ TERMINAL

- Part No.: T4201XX-X
- Applicable wire: AWG#20-#24
- Material: Brass or Phosphor Bronze
- Finish: Tin Plated or Gold-Flash
- The Dimension Marked “▼” Must Be Recorded

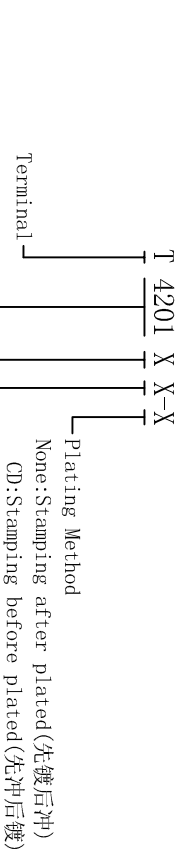

4.20mm Pitch Male Series

Terminal Material

B: Brass  
 P: Phosphor Bronze  
 H: High Conductivity Copper

CONTACT FINISH

T: Tin Plated  
 G: Gold Flash  
 G3: 3u" MIN GOLD  
 G10: 10u" MIN GOLD  
 G15: 15u" MIN GOLD  
 G30: 30u" MIN GOLD

D	更新图面	2019-07-03	陈雄军	更新图面	2019-07-03	陈雄军
C	修打版本	2018-07-09	陈雄军	修打版本	2018-07-09	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军	新版本	2011-05-24	陈雄军
H	版次 RRV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.	日期 DATE.	承认 APPRO.
1	1	2	3	4	5	6

一般公差 GENERAL TOLERANCE:	0 ± 0.30 .0 ± 0.25 .000 ± 0.05
ANGLE: ± 1°	

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan Xiangyun Connector s CO., Ltd

投影法  
 Projection

单位 Unit  
 MM

比例/Scale  
 1:1

大小/Size  
 A4

页码/Sheet  
 1/1

版本/Rev  
 D

品名  
 (PART NAME)

Molex 4.20mm Male Terminal  
 Connector Series

料号  
 (PART NO)

T4201XX-X

状态码  
 C