

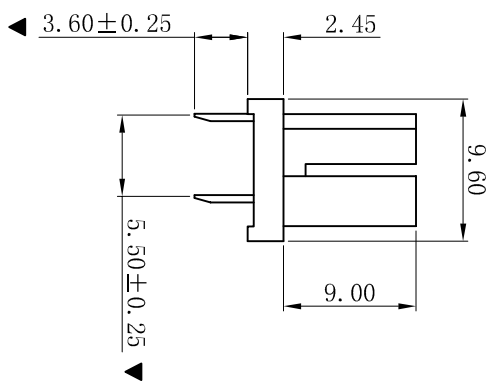



RoHS

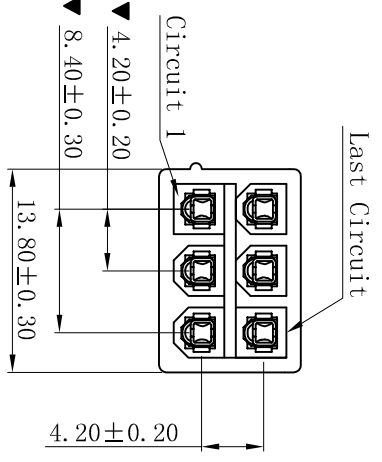

PCB LAYOUT: Component Side
Recommended PCB Thickness 1.78MAX

- SPECIFICATIONS**
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C +85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W4201VT-2x03P-PCI-SW
 - Poles: 06P
 - Housing Material: PA66 UL94V-0 COLOR NATURA
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Tin Plating Fog
 - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-07-03		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection		品名 (PART NAME)		Molex 4.20mm 180° 2P4Y孔位	
修订版本		2015-11-04		陈雄军		绘图/DR		陈雄军		单位 Unit		MM		(PART NOME)	
变更图宽格式内容		2013-12-27		陈雄军		审核/CHECK		陈雄军		比例/Scale		1:1		料号 (PART NO)	
新版本		2011-05-24		陈雄军		批准/APPRO		胡进		大小/Size		A4		W4201VT-2x03P-PCI-SW	
说明 DESCRIPTION		日期 DATE		承认 APPRO.		日期/DATE		2019-07-03		页码/Sheet		1/1		状态码	
版次 REV.		1		3		4		5		6		7		8	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors Co., Ltd