

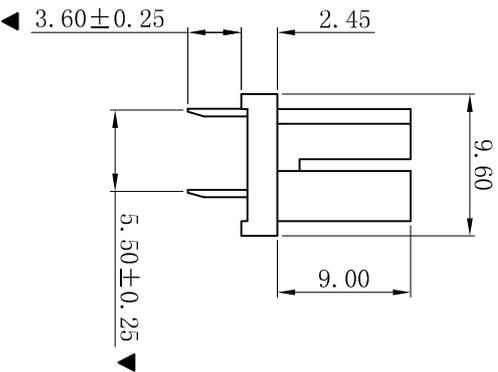



RoHS

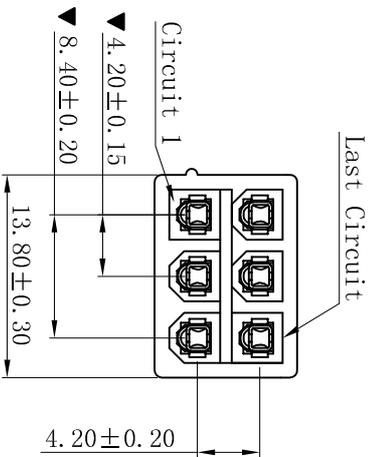

PCB LAYOUT: Component Side
Recommended PCB Thickness 1.78MAX

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C +85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4201VT-2x03P-PCI-V0BKSW
 - Poles: 06P
 - Housing Material: PA66 UL94V-0 COLOR Black
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Tin Plating Fog
 - The Dimension Marked “▼” Must Be Recorded

B	更新图面	2019-07-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	修订版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	说明	日期	承认	说明
1	DESCRPTION	DATE	APPRO.	1

<p>XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd</p>	
<p>投影法 Projection 单位 Unit MM</p>	<p>品名 (PART NAME) Molex 4.20mm 180° 2P4Y孔位 公座 Wafer Connector Series</p>
<p>一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°</p>	<p>料号 (PART NO) W4201VT-2x03P-PCI-V0BKSW</p>
<p>绘图/DR 审核/CHECK 核准/APPRO 日期/DATE</p>	<p>胡进 陈雄军 胡进 2019-07-03</p>
<p>大小/SIZE 页码/SHEET 版本/Rev</p>	<p>A4 1/1 D</p>
<p>日期/DATE</p>	<p>状态码 C</p>