
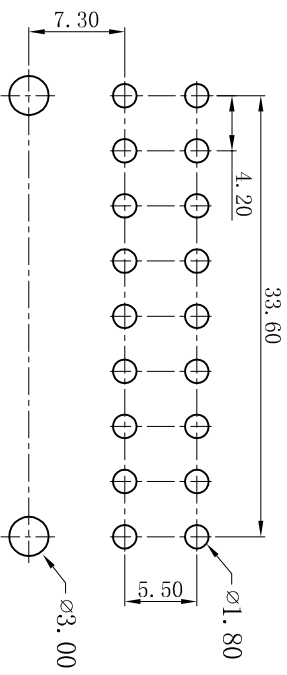
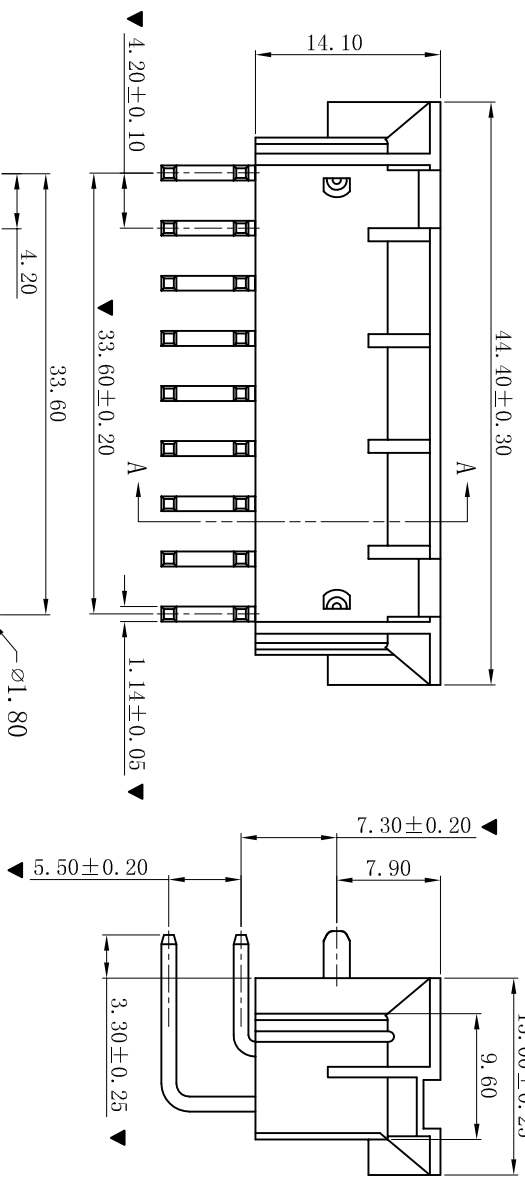


ROHS

第1、9、10、18PIN 加长1.5

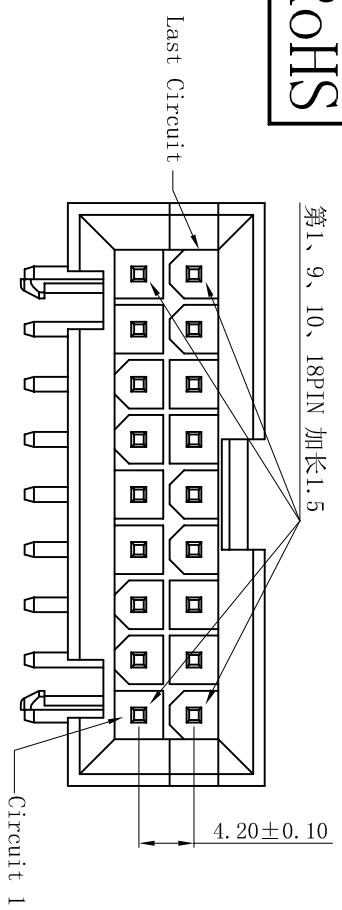


PCB LAYOUT: Component Side
Recommended PCB Thickness 1.78MAX

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W4202LRD-2x09P-JC4P
- Poles: 18P
- Housing Material: PA66 UL94V-0 NATURAL
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded



SECTION: A-A

更新图画		2019-07-03		PZC Data		一般公差 GENERAL TOLERANCE:		0±0.30 -0±0.25 .00±0.20 .000±0.05		CONNECTORS		XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd		品名 (PART NAME)		Molex 4.20mm 90° 喇叭口 Wafer Connector Series		料号 (PART NO)		W4202LRD-2x09P-JC4P		状态码 C			
修订版本		2015-11-04		陈雄军		绘图/DR		PZC Data		投影法 Projection		第一版		单位 Unit		MM		页码/SHEET		1/1		版本/Rev		D	
变更图宽格式内容		2013-12-27		陈雄军		审核/CHECK		陈雄军		比例/Scale		1:1		大小/Size		A4		日期/DATE		2019-07-03		胡进		承认	
新版本		2011-05-24		陈雄军		核准/APPRO		胡进		日期/DATE		2019-07-03		日期/DATE		2011-05-24		陈雄军		承认		APPRO.		说明	
版次 REV.		1		1		3		4		5		6		7		8		9		10		H		G	