
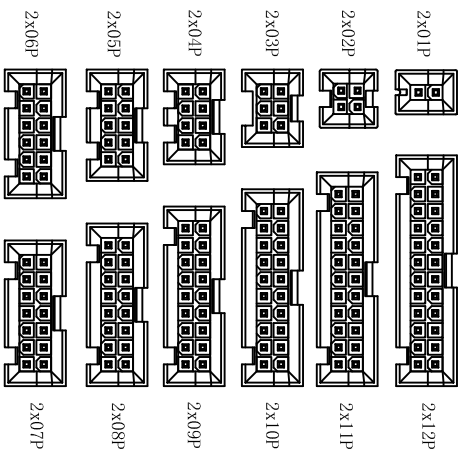


PCB LAYOUT: Component Side
Recommended PCB Thickness 1.78MAX

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W4202LVD-2xNP
 - Poles : 02-24P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - Mates With: W4201VTD, H4201L and H4201 dual row receptacle
 - The Dimension Marked “▼” Must Be Recorded
 - PIN L=1.14x13.70

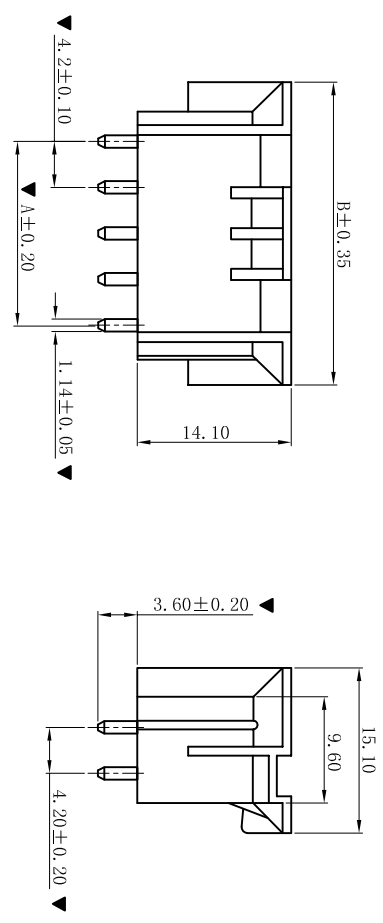

CIRCUIT SIZE LAYOUT

Part No.	Dimensions (mm)	
	A	B
2x01	4.20	10.80
2x02	8.40	15.00
2x03	12.60	19.20
2x04	16.80	23.40
2x05	21.00	27.60
2x06	25.20	31.80
2x07	29.40	36.00
2x08	33.60	40.20
2x09	37.80	44.40
2x10	42.00	48.60
2x11	46.20	52.80
2x12	50.40	57.00

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

D	更新图面	2019-07-03	陈雄军	更新图面	2019-07-03
C	修订版本	2015-11-04	陈雄军	修订版本	2015-11-04
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容	2013-12-27
A	新版本	2011-05-24	陈雄军	新版本	2011-05-24
H	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期/DATE

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05	投影法 Projection	品名 (PART NAME)	Molex 4.20mm 180° 喇叭口 Wafer Connector Series
角度: ±1°	ANGLE: ±1°	单位 Unit	料号 (PART NO)	W4202LVD-2xNP
绘图/DR	陈雄军	比例/Scale	页码/SHEET	1/1
审核/CHECK	胡进	大小/Size	版本/New	D
批准/APPRO	胡进	日期/DATE		