



RoHS

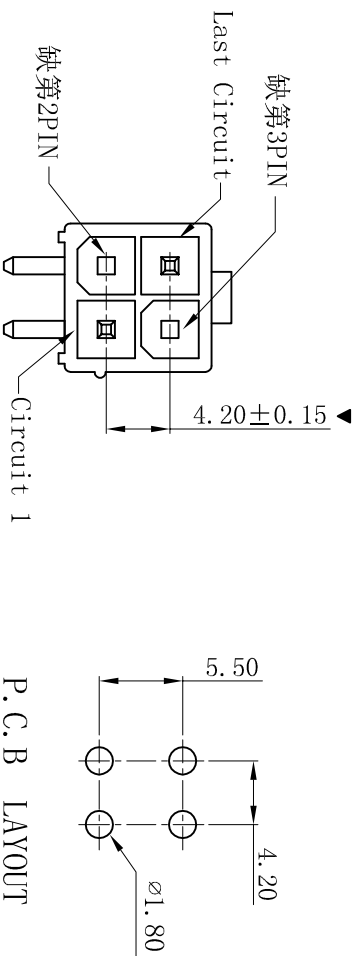

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202R-2x02P-Q2P
 - Poles: 04P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - Mates With: H4201 dual row receptacle
 - The Dimension Marked “▼” Must Be Recorded

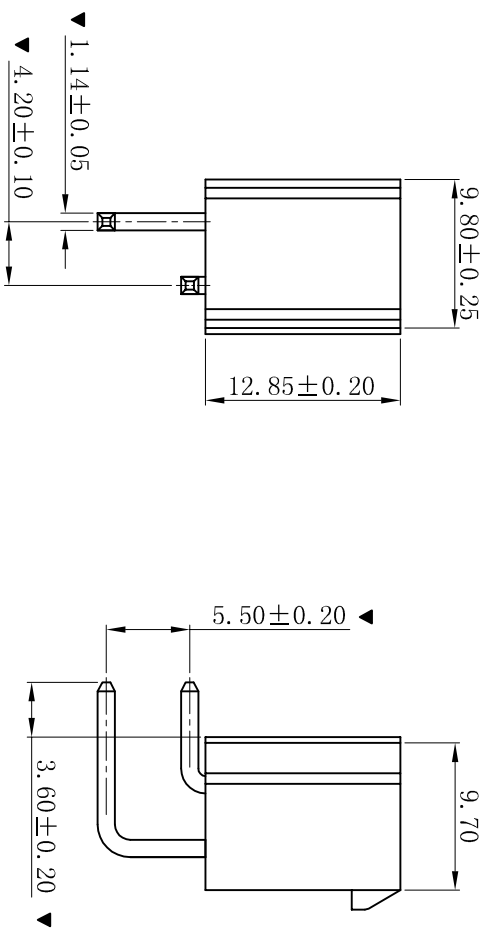

更新图面		2019-07-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) Molex 4.20mm 90° Wafer Connector Series	
修订版本		2015-11-04	陈雄军	绘图/DR 审核/CHECK 批准/APPRO		陈雄军 陈雄军 胡进		料号 (PART NO) W4202R-2X02P-Q2P	
变更图宽格式内容		2013-12-27	陈雄军	日期/DATE		2019-07-03		状态码 C	
新版本		2011-05-24	陈雄军	说明 DESCRIPTION		日期/DATE		版本/REV	
版次 REV.		1	陈雄军	日期/DATE		2011-05-24		版本/REV	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd

更新图面		2019-07-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) Molex 4.20mm 90° Wafer Connector Series	
修订版本		2015-11-04	陈雄军	绘图/DR 审核/CHECK 批准/APPRO		陈雄军 陈雄军 胡进		料号 (PART NO) W4202R-2X02P-Q2P	
变更图宽格式内容		2013-12-27	陈雄军	日期/DATE		2019-07-03		状态码 C	
新版本		2011-05-24	陈雄军	说明 DESCRIPTION		日期/DATE		版本/REV	
版次 REV.		1	陈雄军	日期/DATE		2011-05-24		版本/REV	