RoHS

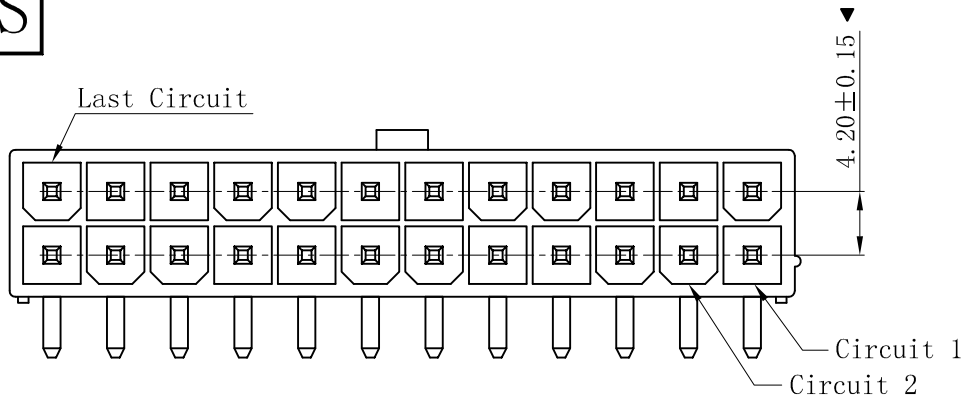

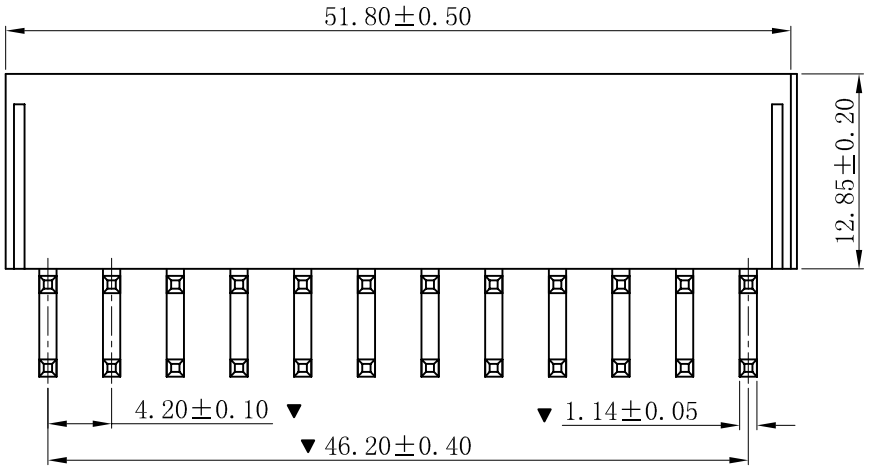

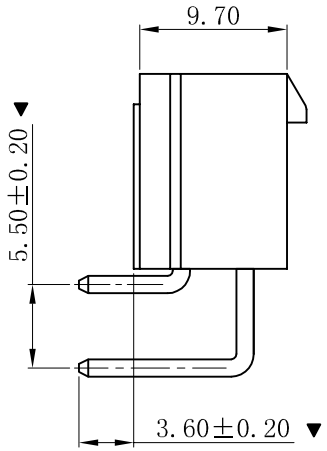

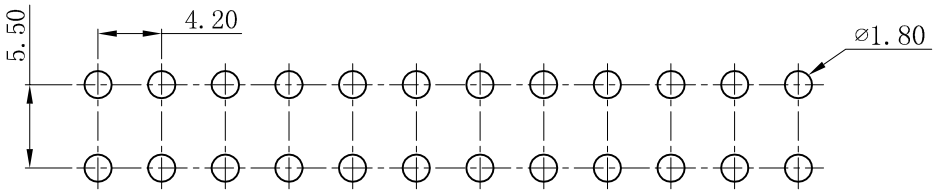

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W4202R-2x12P-6TBE
- Poles: 24P
- Housing Material: PA6T UL94V-0 Natural
- Pin Material: Brass
- Contact:Tin Plated Thickness 100u",Over 50u" Nickel
- Mates With: H4201 dual row receptacle
- Resistance to Wave Soldering Heat: 270+5/-0° C,5Sec
- Operating Temperature: -40° C~+105° C
- Contact Retention Force: >=1.00 kgf
- The Dimension Marked "▼" Must Be Recorded

版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
D	更新图面	2019-07-03	PH.Duan
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°
绘图/DR	PH.Duan
审核/CHECK	陈雄军
核准/APPRO	胡 进
日期/DATE	2019-07-03

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

投影法 Projection	
单位 Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/1
版本/Rev	D

品 名 (PART NEME)	Molex 4.20mm 90° Wafer Connector Series	
料 号 (PART NO)	W4202R-2x12P-6TBE	状态码 C