
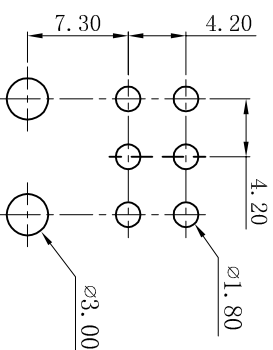
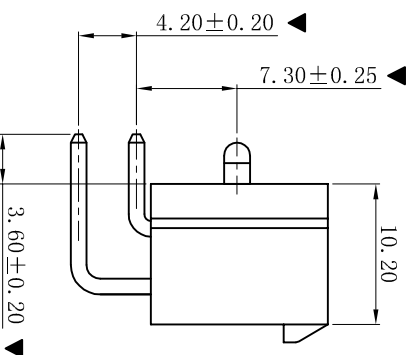
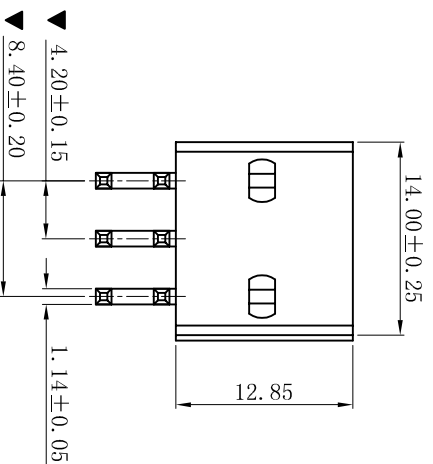


ROHS

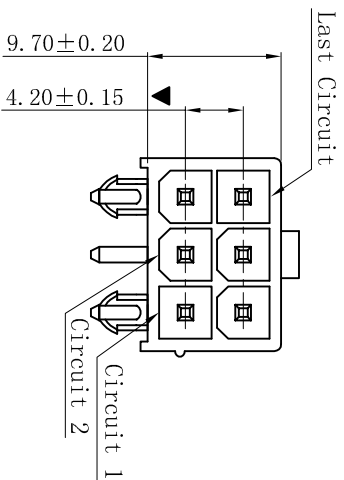

P. C. B LAYOUT

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M $\Omega$  min
- Temperature range: -25 $^{\circ}$ C +85 $^{\circ}$ C
- Contact resistance: 20m $\Omega$  max
- WAFER
- Part No. : W4202RD-2x03P-PCI-4.2
- Poles: 06P
- Housing Material: PA66 UL94V-2
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- Mates With: H4201 dual row receptacle
- The Dimension Marked “▼” Must Be Recorded

|            |  |            |  |     |  |  |  |                                    |  |   |  |
|------------|--|------------|--|-----|--|--|--|------------------------------------|--|---|--|
| 更新图面       |  | 2019-07-03 |  | 陈雄军 |  | 一般公差<br>GENERAL TOLERANCE:<br>0±0.30<br>.0±0.25<br>.00±0.20<br>.000±0.05<br>ANGLE: ±1 $^{\circ}$ |  | 投影法<br>Projection<br>单位 Unit<br>MM |  | 品名<br>(PART NAME)<br>Molex 4.20mm 90 $^{\circ}$ 定位柱<br>PCI Wafer Connector Series |  |
| 修訂版本       |  | 2015-11-04 |  | 陈雄军 |  | 绘图/DR<br>陈雄军   |  | 审核/CHECK<br>陈雄军                    |  | 料号<br>(PART NO)<br>W4202RD-2x03P-PCI-4.2  |  |
| 变更图览格式内容   |  | 2013-12-27 |  | 陈雄军 |  | 审核/APPRO<br>陈雄军  |  | 批准/APPRO<br>胡进                     |  | 状态码<br>C  |  |
| 新版本        |  | 2011-05-24 |  | 陈雄军 |  | 日期<br>DATE:<br>2019-07-03  |  | 日期/DATE<br>2019-07-03              |  | 页码/SHEET<br>1/1   |  |
| 说明         |  | 说明         |  | 承认  |  | 日期/DATE  |  | 日期/DATE                            |  | 版本/Rev<br>D   |  |
| 版次<br>REV. |  | 1          |  | 1   |  | 1  |  | 1                                  |  | 1   |  |

**XYDZ<sup>®</sup> 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd