

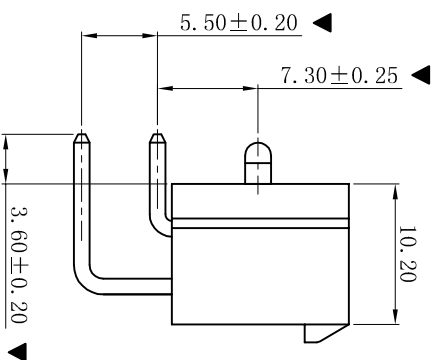
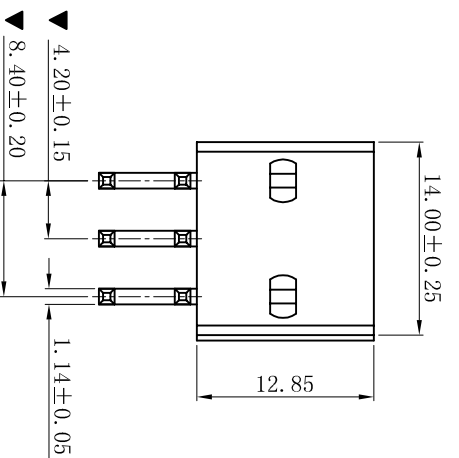


RoHS

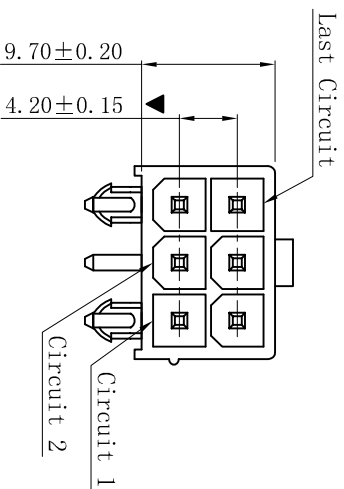

P.C.B LAYOUT

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C +85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No.: W4202RD-2x03P-PCI
 - Poles: 06P
 - Housing Material: PA66 UL94V-2
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - Mates With: H4201 dual row receptacle
 - The Dimension Marked "▼" Must Be Recorded

D	更新图面	2019-07-03	陈雄军	更新图面	2019-07-03	陈雄军
C	修订版本	2015-11-04	陈雄军	变更图宽格式内容	2013-12-27	陈雄军
B	新版本	2011-05-24	陈雄军	说明	2011-05-24	陈雄军
A	版次	说明	日期	说明	日期	日期
	REV.	DESCRIPTION	DATE	DESCRIPTION	DATE	DATE

XYDZ[®] 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	单位 Unit	比例/Scale	大小/Size	页码/Sheet	版本/Rev
第一角投影 1st Angle	MM	1:1	A4	1/1	D
品名 (PART NAME)	料号 (PART NO)				
Molex 4.20mm 90 $^{\circ}$ 定位柱 PCI Wafer Connector Series	W4202RD-2x03P-PCI				
	状态码 C				